

Flex3 Static White 5w

CONVEY

Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free

Features:

- Cut Segments in any length up to 16.4'
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at www.conveylighting.com

Also available in Tunable White, Warm Dim and RGBW Options




Feed Options:

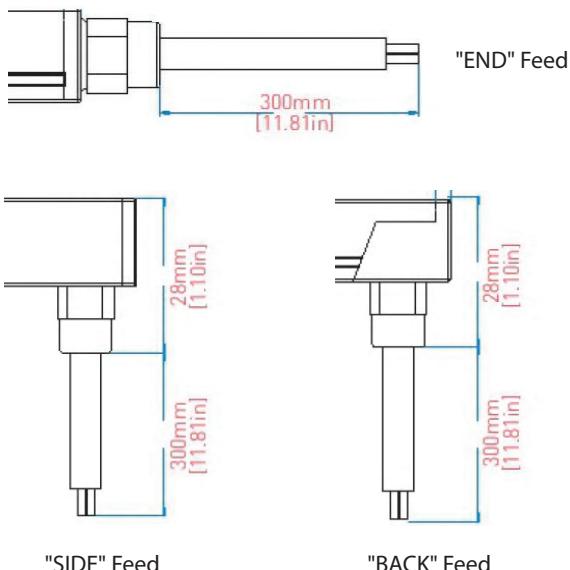

Specifications:

| | |
|---------------------------|------------------------|
| Average Power Consumption | 4.27w per Foot |
| Voltage | 24v DC |
| Binning | 3 step |
| Cut Increment | Any Length up to 16.4' |
| Lumens @ 4000k / 90CRI | 235lm/ft |
| Max. Connection | 16.4' |
| IP Rating | IP67 Standard |
| Beam Angle | 120 Degrees |

Sectional



Ordering Information:


Example:

FLEX3-5W-SW-30-24-E-MC

Model: - CCT(White): - Voltage: - Feed Type: - Mounting:

| | | | | |
|-------------|----|--------------|----|--------|
| FLEX3-5W-SW | 22 | 2200K, 90CRI | 24 | 24v DC |
| | 24 | 2400K, 90CRI | | |
| | 27 | 2700K, 90CRI | | |
| | 30 | 3000K, 90CRI | | |
| | 35 | 3500K, 90CRI | | |
| | 40 | 4000K, 90CRI | | |

Mounting:

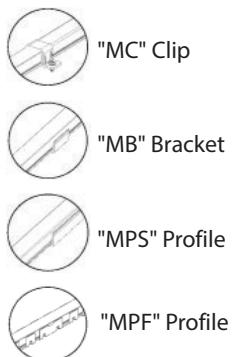

Higher than 40k available as special order
Minimum purchase may apply



LM-80

