

## Details:

- LinearLight 2-SW10.9 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW10.9 is provided in outputs ranging from 1018lm/ft. to 1240lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 1.31" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

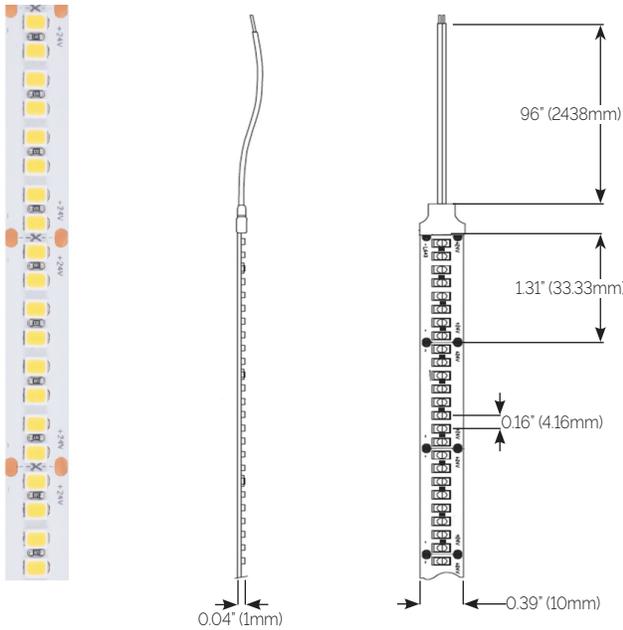

## Specifications:

|                           |                              |
|---------------------------|------------------------------|
| Average Power Consumption | 10.9W/ft.                    |
| Voltage                   | 24V/dc                       |
| Binning                   | 3 step                       |
| Cut Increment             | 1.31"                        |
| Diodes per foot           | 73                           |
| Max. Run                  | 8ft.                         |
| IP Rating                 | IP20 (Class II dry location) |
| Dimensions                | 0.39"W x 0.04"H              |

| CCT          | Lumen Output (lm/ft.) | Efficacy (lm/W) |
|--------------|-----------------------|-----------------|
| 1800K @90CRI | 1127                  | 103             |
| 2200K @90CRI | 1018                  | 93              |
| 2400K @95CRI | 1072                  | 98              |
| 2700K @98CRI | 1128                  | 103             |
| 3000K @98CRI | 1178                  | 108             |
| 3500K @98CRI | 1240                  | 114             |
| 4000K @98CRI | 1240                  | 114             |

## Ordering Information:

Example:  
L2-SW10.9-30-32'

Model:  - CCT:  - Length:  - Transformer/PSU:

**L2-SW10.9** 10.9W/ft.

**18** 1800K, 90CRI  
**22** 2200K, 90CRI  
**24** 2400K, 95CRI  
**27** 2700K, 98CRI  
**30** 3000K, 98CRI  
**35** 3500K, 98CRI  
**40** 4000K, 98CRI

**1'-16'** SPECIFY  
**C** CUSTOM

**TXXX** SPECIFIED  
 SEPARATELY