

Details:

- LinearLight 2-SW4.5 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW4.5 is provided in outputs ranging from 429lm/ft. to 595lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 2.46" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

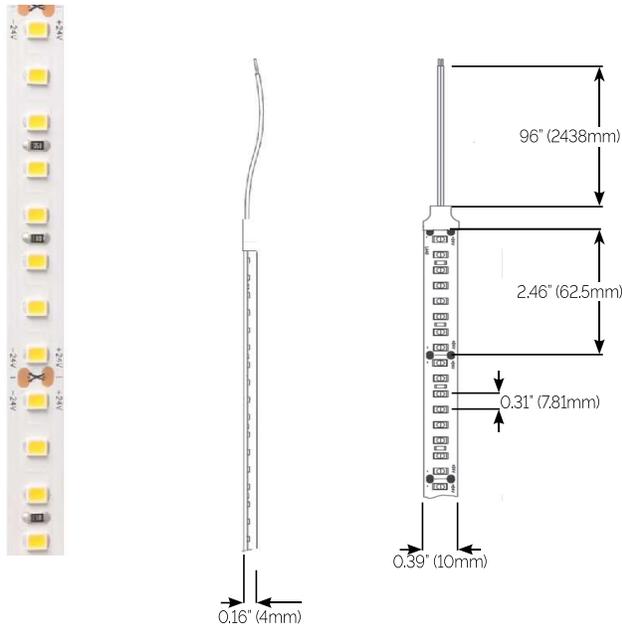

Specifications:

Average Power Consumption	4.5W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.46"
Diodes per foot	39
Max. Run	16ft.
IP Rating	IP68 (Wet location)
Dimensions	0.39"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	429	97
2200K @90CRI	467	86
2400K @95CRI	487	90
2700K @98CRI	519	96
3000K @98CRI	547	101
3500K @98CRI	595	110
4000K @98CRI	595	110

Ordering Information:

Example:
L2W-SW4.5-30-32'

Model: - CCT: - Length: - Transformer/PSU:

L2W-SW4.5 4.5W/ft.

- 18** 1800K, 90CRI
- 22** 2200K, 90CRI
- 24** 2400K, 95CRI
- 27** 2700K, 98CRI
- 30** 3000K, 98CRI
- 35** 3500K, 98CRI
- 40** 4000K, 98CRI

1'-16' SPECIFY
C CUSTOM

TXXX SPECIFIED
SEPARATELY