

# Sheetled - RGBW

## Details:

• Flat Panel and Bendable LED Sheets for Backlighting Applications. Not Recommended for use with scissors.

## Features:



- Cut Segments in 4.72" x 1.58" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)

Also available in Static White, Tunable and RGB+Tunable Options

## Dimensions:

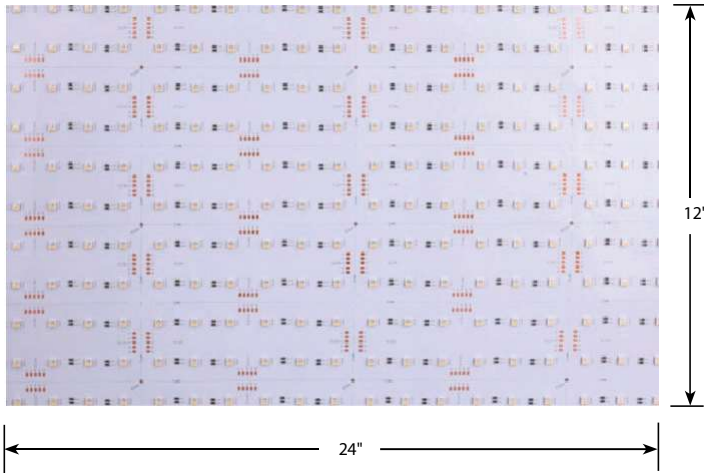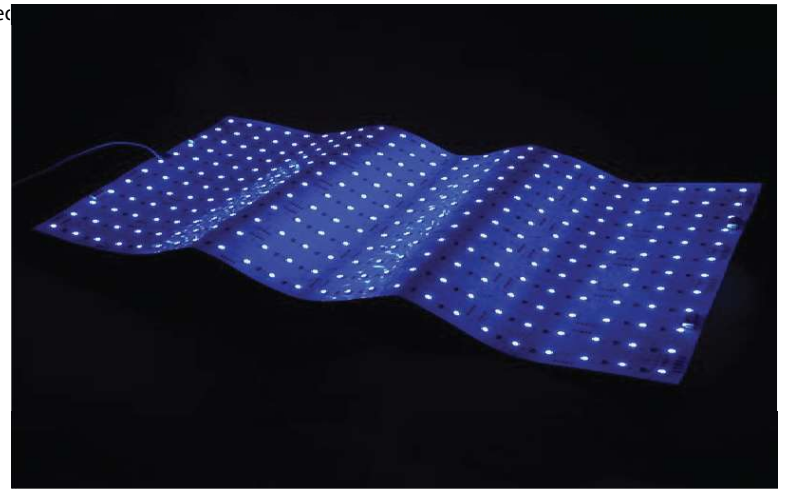

## Specifications:

Average Power Consumption	20w/40w/60w/80w Per 12"x24" Sheet
Voltage	24V/dc
Binning	3 step
Cut Increment	6 LED Sections (4.72"x1.58")
Height with XH Connector	0.31"
Max. Connection	240w / 10amp @ 24v
IP Rating	IP20 or IP54 Options
Beam Angle	120 Degrees

CCT	Lumen Output (lm/ft <sup>2</sup> )
White Only	1260
Red Only	540
Green Only	1140
Blue Only	260
All Colors Combined	3200

Data Based on 80w Sheet


20w x 0.25  
40w x 0.50  
60w x 0.75

## Ordering Information:


Example:

SHEET-**RGBW**-30-60-IP20


Model:




CCT(White):



Wattage:



Rating:




SHEET-**RGBW**

27 2700K, 90CRI  
30 3000K, 90CRI  
35 3500K, 90CRI  
40 4000K, 90CRI

20 20w Per 12x24  
40 40w Per 12x24  
60 60w Per 12x24  
80 80w Per 12x24

IP20 Dry Location  
IP54 Damp Location

Feed and Connector (Included)



"XH" Connector for secure connections

Power Supply Data Sheet

T-PSU-DMX (4 Channel)

Universal Voltage 24v Driver with built in DMX Encoder.

LM-80

