

Flex0 Static White 3w - Side Bend

CONVEY

Details:

- Flexible and Single Axis Bendable LED profile.
- Standard product is IP54 Rated for indoor use.
- "Dot" Free

Features:

- Cut Segments in any length up to 16.4'
- Mounting via brackets or straight channel.
- Factory Cutting and Kiting Suggested but not necessary.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors only.
- 90CRI Standard
- TM-30 data available at www.conveylighting.com



Feed Options:


"END" Feed

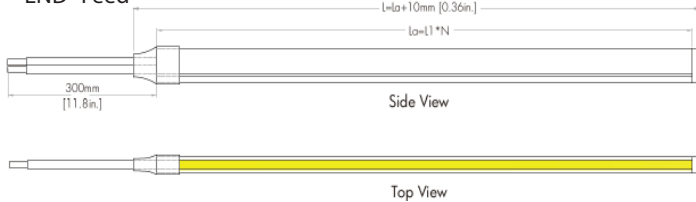



Specifications:

Average Power Consumption	2.74w per Foot
Voltage	24v DC
Binning	3 step
Cut Increment	Any Length up to 16.4'
Lumens @ 4000k / 90CRI	95lm/ft
Max. Connection	16.4'
IP Rating	IP54 Standard
Beam Angle	120 Degrees

Sectional



Side Bend Only

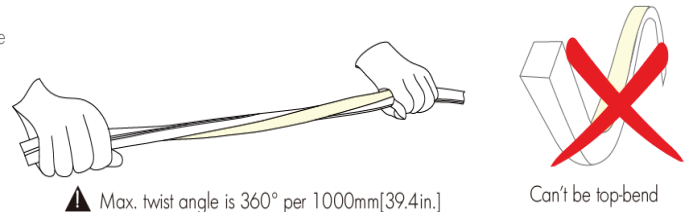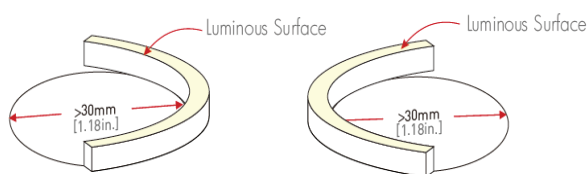

Ordering Information:

Example:

FLEX0-3W-SB-SW-30-24-E-

Model:



FLEX0-3W-SB-SW

CCT(White):



18 1800K 90CRI
22 2200K, 90CRI
24 2400K, 90CRI
27 2700K, 90CRI
30 3000K, 90CRI
35 3500K, 90CRI
40 4000K, 90CRI

Voltage:



24 24v DC

Feed Type:



E End Feed

Mounting:



MB Bracket
PS Profile Straight

Mounting:



"MB" Bracket



"MPS" Profile

Higher than 40k available as special order
Minimum purchase may apply