

Details:


- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free

Features:


- Cut Segments in any length up to 32.8'
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested but not necessary.
- Power Leads and Connectors included at no charge.

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at www.conveylighting.com

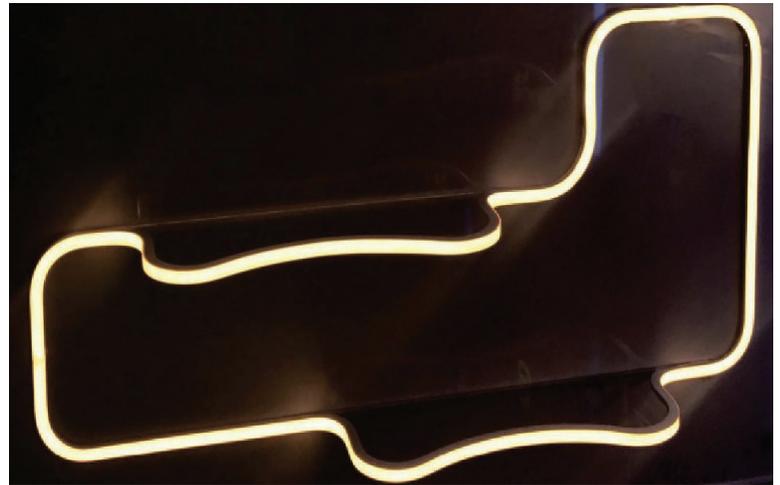


Feed Options:

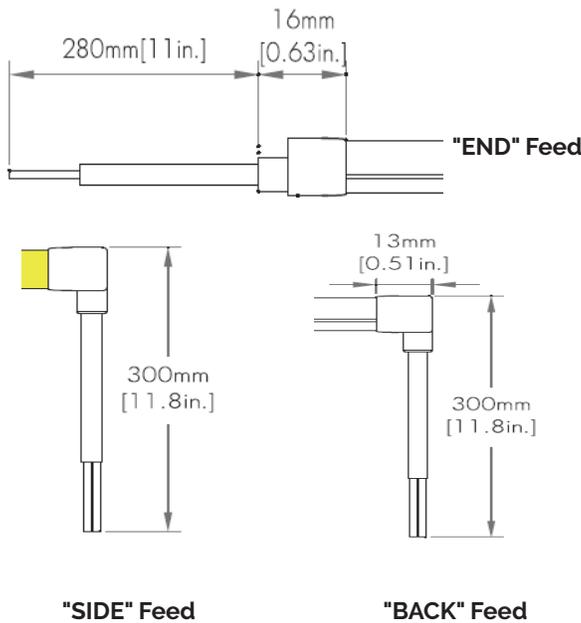


Specifications:

Average Power Consumption	2.44w per Foot
Voltage	24v DC
Binning	3 step
Cut Increment	Any Length up to 32.8'
Lumens @ 4000k / 90CRI	137lm/ft
Max. Connection	32.8'
IP Rating	IP67 Standard
Beam Angle	120 Degrees

Sectional

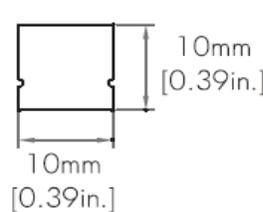

Dual Bending in one Product

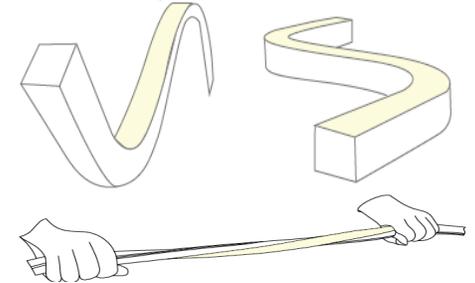

Ordering Information:

Example:
 FLEX1-3W-SW-30-24-E-MC

Model: - CCT(White): - Voltage: - Feed Type: - Mounting:


FLEX1-3W-SW **18** 1800K, 90CRI
 20 2000K, 90CRI
 22 2200K, 90CRI
 24 2400K, 90CRI
 27 2700K, 90CRI
 30 3000K, 90CRI
 35 3500K, 90CRI
 40 4000K, 90CRI

24 24v DC

E End Feed
S Side Feed
B Back Feed

MC Clip
MB Bracket
PS Profile Straight
PF Profile Flexible

Mounting:

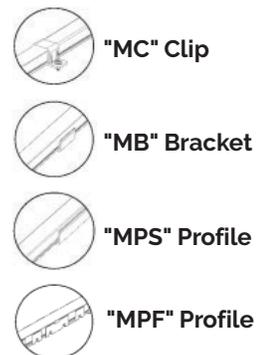

Higher than 40k available as special order
 Minimum purchase may apply