

Flex3 Tunable White 5w

CONVEY

Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free

Features:

- Cut Segments in any length up to 16.4'
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at www.conveylighting.com

Also available in Static White, RGB and RGBW Options




Feed Options:

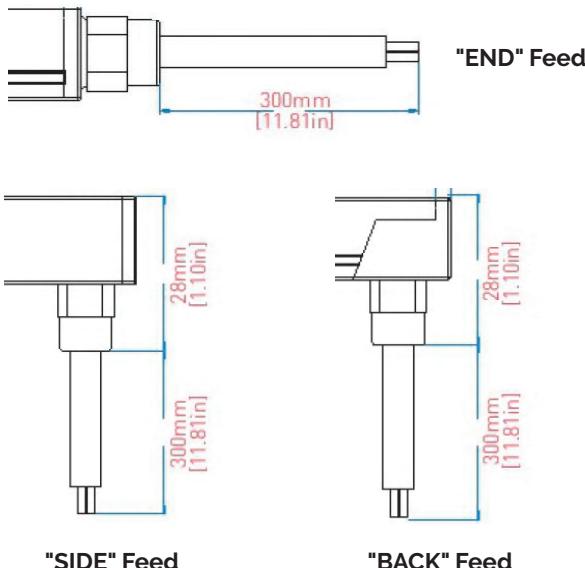

Specifications:

Average Power Consumption	4.27w per Foot
Voltage	24v DC
Binning	3 step
Cut Increment	Any Length up to 16.4'
Lumens @ 4000k / 90CRI	220lm/ft
Max. Connection	16.4'
IP Rating	IP67 Standard
Beam Angle	120 Degrees

Sectional



Ordering Information:

Example:

FLEX3-5W-TW-27/65-24-S-MPF

Model:

Tunable White:

Voltage:

- - - -

FLEX3-5W-TW

27/65 2700k-6500k
18/40 1800k-4000k

24 24v DC


Feed Type:

E End Feed
S Side Feed
B Back Feed

Mounting:

MC Clip
MB Bracket
MPS Profile Straight
MPF Profile Flexible

Mounting:

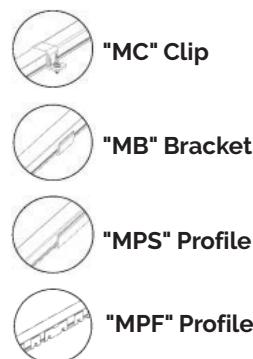

Special CCT mixing available
ie: 1800k/3500k

Minimums may apply