

Details:

- LinearLight 2-COB is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-COB is provided an average output of 384lm/ft
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.04" Increments with diode free illumination.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Suitable for all BE2 Profiles.
- 96" Power Leads standard.

Lighting Features:

- 150° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

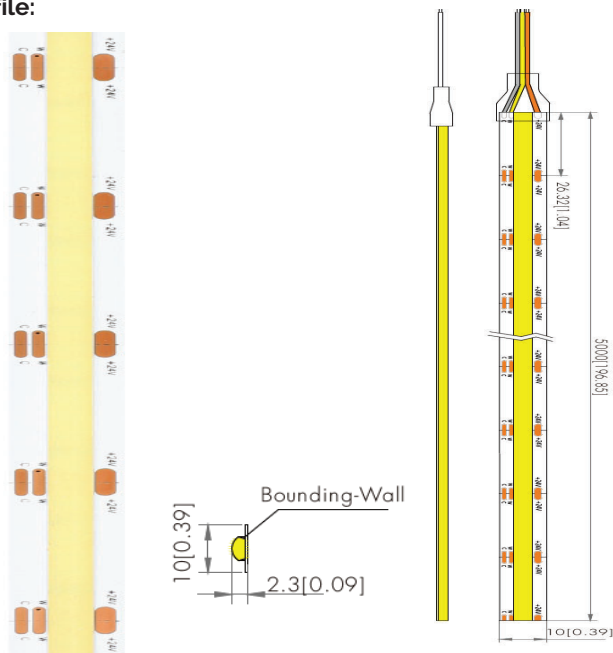

Specifications:

Average Power Consumption	4.3W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.04"
Diodes per foot	185
Max. Run	16ft.
IP Rating	IP20 (Dry location) or IP67 (Wet)
Dimensions	0.39"W x 0.09"H (* See IP67 Note)

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
ALL ON @95CRI	384	89
1800K @90CRI	133	62
2700K @95CRI	166	77
3000K @ 95CRI	182	84
6500K @ 95CRI	218	101

Ordering Information:

Example:
L2COB-TW4.3-27/65-14'

Model: - CCT: - Length: - Transformer/PSU:

L2COB-TW4.3 4.3W/ft. **27/65** 2700/6500K **1'-16'** SPECIFY **TXXX** SPECIFIED
18/30 1800/3000K **C** CUSTOM SEPARATELY

L2COBW-TW4.3

See Note on IP67
(*)

(*) L2COBW IP67 Version dimensions increase to 0.47"W x 0.16"H