

## Details:

- Flat Panel and Bendable LED Sheets for Backlighting Applications. Not Recommended for direct view applications.
- Flexible for various applications and field cuttable with scissors.


## Features:

- Cut Segments in 0.94"x0.94" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 90CRI Standard
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)

Also available in [Static White](#), [Tunable White](#), [RGBW](#) and [RGB+TW](#) options

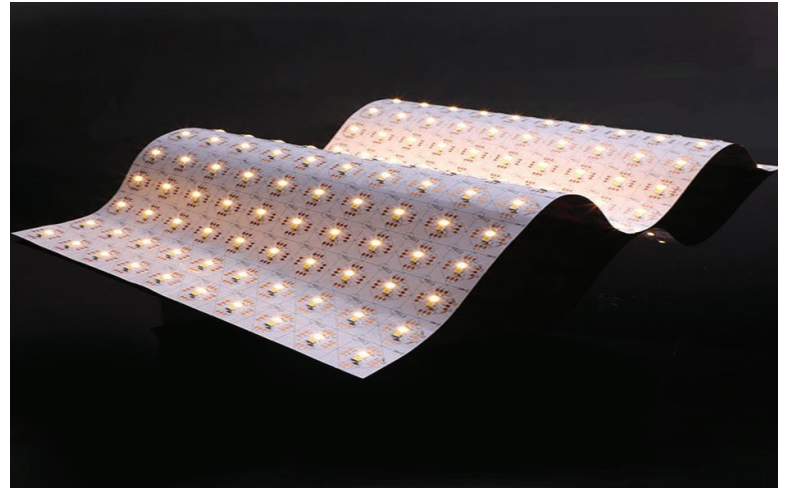

## Dimensions:

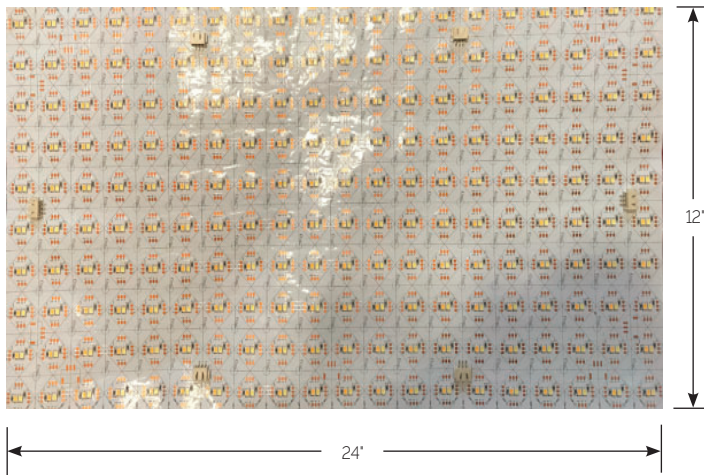

## Specifications:

Average Power Consumption	20w/40w/60w/90w Per 12'x24' Sheet
Voltage	24V/dc
Binning	3 step
Cut Increment	1 LED Sections (0.94"x0.94")
Height with XH Connector	0.31"
Max. Connection	240w / 10amp @ 24v
IP Rating	IP20 or IP54 Options

Wattage	Lumen Output (lm/ft <sup>2</sup> )
20w	1590
40w	3060
60w	4490
90w	6430


Data based on 3000k Output.

## Ordering Information:

Example:  
SHEET-WD-18/30-90-IP20 (18k to 30k)

Model:	CCT(White):	Wattage:	Rating:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>SHEET-WD</b>	<b>18/30</b> 18-30K, 90CRI <b>22/30</b> 22-30K, 90CRI	<b>20</b> 20w Per 12x24 <b>40</b> 40w Per 12x24 <b>60</b> 60w Per 12x24 <b>90</b> 90w Per 12x24	<b>IP20</b> Dry Location <b>IP54</b> Damp Location

## Feed and Connector (Included)



"XH" Connector for secure connections

LM-80

