

Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free

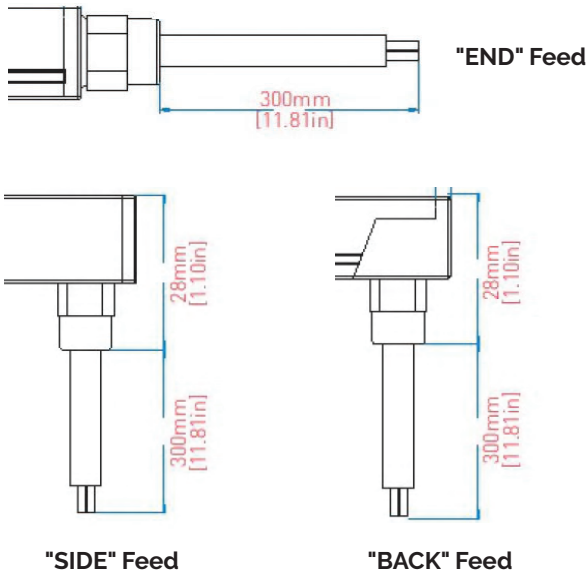
Features:

- Cut Segments in 3.28"
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.

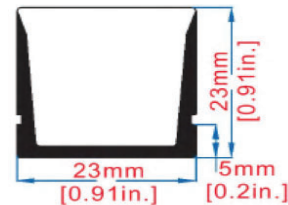
Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at www.conveylighting.com

Also available in Static White, Tunable White, RGB and RGBW Options

**Feed Options:****Specifications:**

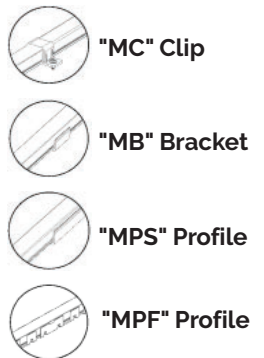
Average Power Consumption	4.27w per Foot
Voltage	24v DC - DMX Wiring
Binning	3 step
Cut Increment	2.46"
Lumens @ 4000k / 90CRI	85lm/ft
Max. Connection	24v (16.4')
IP Rating	IP67 Standard
Beam Angle	120 Degrees

Sectional**Ordering Information:**

Example:
FLEX3-PXL-RGBW-30-24-E-MPF

Model:	White:	Voltage:	Feed Type:	Mounting:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
FLEX3-PXL-RGBW	30 3000K 40 4000K	24 24v DC	E End Feed S Side Feed B Back Feed	MC Clip MB Bracket MPS Profile Straight MPF Profile Flexible

Mounting:



LM-80

