# Flex3 Warm Dim 5w

CONVEY

**Details:**

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free

**Features:**

- Cut Segments in any length up to 16.4'
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.

**Lighting Features:**

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at *www.conveylighting.com*

*Also available in Static White, Tunable White and RGBW Options*

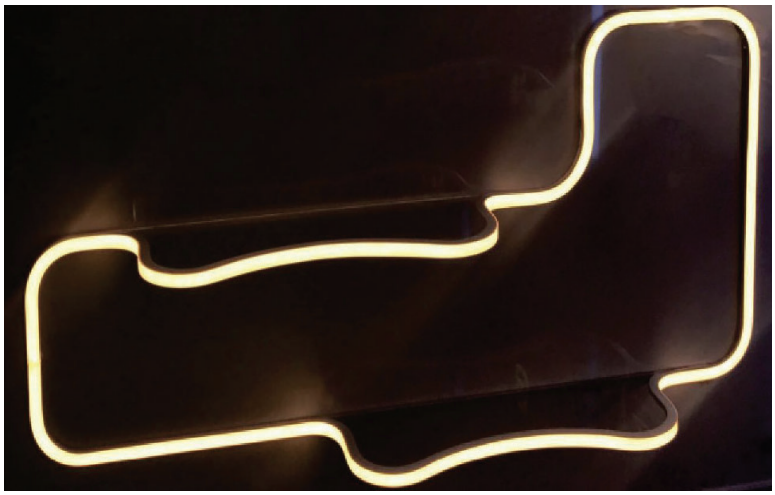

**Feed Options:**

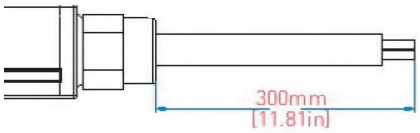


**"END" Feed**




**"SIDE" Feed**




**"BACK" Feed**

**Specifications:**

| | |
|---|---|
| Average Power Consumption | 4.27w per Foot |
| Voltage | 24v DC |
| Binning | 3 step |
| Cut Increment | Any Length cutting up to 16.4' |
| Lumens @ 3000k / 90CRI | 235lm/ft |
| Max. Connection | 16.4' |
| IP Rating | IP67 Standard |
| Beam Angle | 120 Degrees |

**Sectional**




## Ordering Information:

Example:
FLEX3-5W-WD-18/30-24-E-MC

| Model: | CCT(White): | Voltage: | Feed Type: | Mounting: |
|---|---|---|---|---|
| **FLEX3-5W-WD** | **18/30** 1800/3000k<br>**22/30** 2200/3000k | **24** 24v DC | **E** End Feed<br>**S** Side Feed<br>**B** Back Feed | **MC** Clip<br>**MB** Bracket<br>**MPS** Profile Straight<br>**MPF** Profile Flexible |

Mounting:

**"MC" Clip**

**"MB" Bracket**

**"MPS" Profile**

**"MPF" Profile**

**LM-80** 1 BIN/3-STEP

Convey Lighting
101 Hammer Mill Road
Rocky Hill, CT 06067

www.conveylighting.com

info@conveylighting.com