

LinearLight 2W-TW4.4 (WET)

CONVEY

Details:

- LinearLight 2W-TW4.4 is a small profile, IP68 wet listed tunable white LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-TW4.4 is provided in an output of 259lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.64" Increments.
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

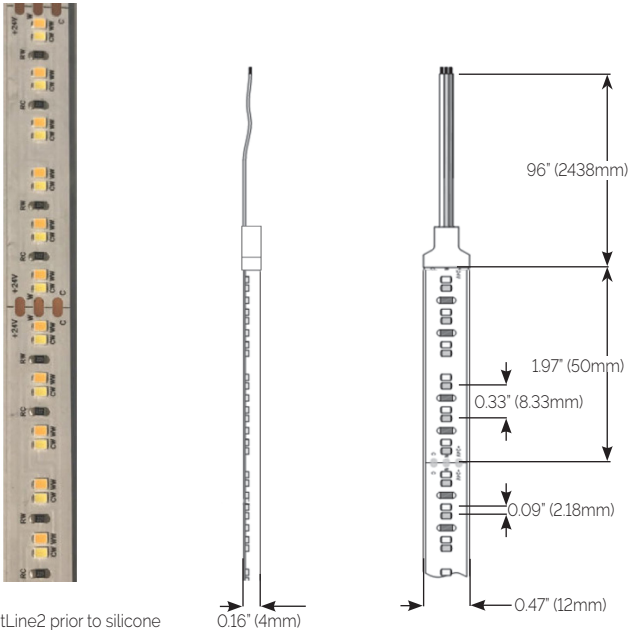

*Image of LightLine2 prior to silicone injection process for IP68 rating

Specifications:

Average Power Consumption	4.4W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	73
Max. Run	16ft.
IP Rating	IP68 (Class II wet location)
Dimensions	0.47"W x 0.16"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2700K,6500K @98CRI	259	59
2200K@90CRI, 4000K @98CRI	259	59
2200K@90CRI, 3000K @98CRI	259	59

Ordering Information:

Example:
L2W-TW4.4-27/65-30'

Model:	CCT:	Length:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
L2W-TW4.4 4.4W/ft.	27/65 2700K/6500K 22/40 2200K/4000K 22/30 2200K/3000K	1'-16' SPECIFY C CUSTOM	TXXX SPECIFIED SEPARATELY



LM-80

