

Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free



Features:

- Cut Segments in 2.46"
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- TM-30 data available at www.conveylighting.com

Also available in Static White, Tunable White and Warm Dim Options

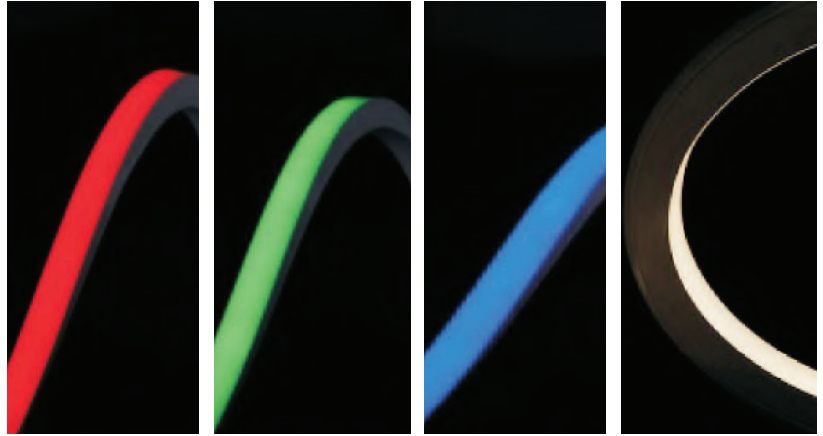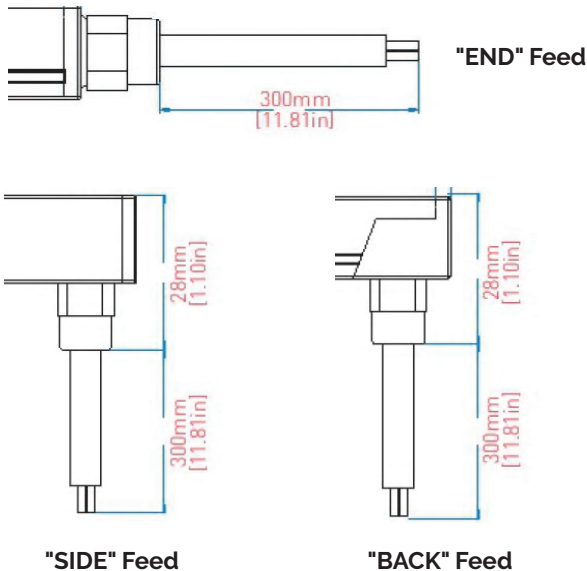
**Feed Options:****Specifications:**

Average Power Consumption	4.27w per Foot (All Colors On)
Voltage	24v DC
Binning	3 step
Cut Increment	2.46"
Lumens @ All Colors and White On	137lm/ft
Max. Connection	16.4'
IP Rating	IP67 Standard
Beam Angle	120 Degrees

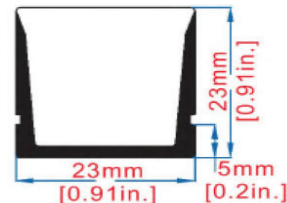Sectional**Ordering Information:**


Example:
FLEX6W-RGBW27-24-S-MPF

Model:




FLEX3-5W

RGB+White:




RGBW27 RGB+27K
RGBW30 RGB+30K
RGBW35 RGB+35K
RGBW40 RGB+40K
RGBW50 RGB+50K
RGBW65 RGB+65K

Voltage:




24 24v DC

Feed Type:



E End Feed
S Side Feed
B Back Feed

Mounting:



MC Clip
MB Bracket
Profile Straight
Profile Flexible

Mounting:



"MC" Clip



"MB" Bracket



"MPS" Profile



"MPF" Profile



LM-80

