Flex2 RGB and RGBW 5w

CONVEY

Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free

Features:

- Cut Segments in 1.97"
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- TM-30 data available at www.conveylighting.com

Also available in Static White, Tunable White and Warm Dim Options

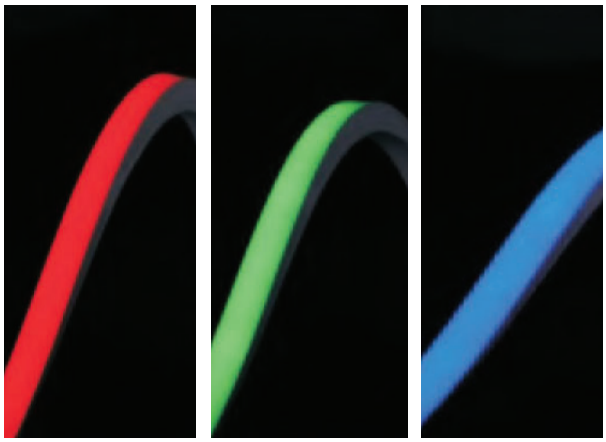

Feed Options:

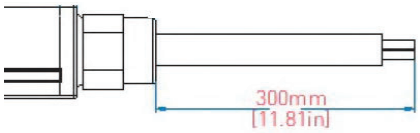

"END" Feed



"SIDE" Feed



"BACK" Feed

Specifications:

Average Power Consumption	4.27w per Foot (All Colors On)
Voltage	24v DC
Binning	3 step
Cut Increment	1.97"
Lumens	183lm/ft (All Colors On)
Max. Connection	22'
IP Rating	IP67 Standard
Beam Angle	120 Degrees

Sectional



Note:
RGBW version adds 1mm
17mm / 0.67" High.
Width remains the same

Ordering Information:

Example:
FLEX2-5W-RGBW-35-24-S-MPF

Model:	White (RGBW):	Voltage:	Feed Type:	Mounting:
FLEX2-5W-RGB	22 2200k	24 24v DC	E End Feed	MC Clip
FLEX2-5W-RGBW	24 2400k		S Side Feed	MB Bracket
	27 2700k		B Back Feed	MPS Profile Straight
	30 3000k			MPF Profile Flexible
	35 3500k			
	40 4000k			

Mounting:


"MC" Clip


"MB" Bracket


"MPS" Profile


"MPF" Profile

LM-80

1 BIN/3-STEP

Convey Lighting
101 Hammer Mill Road
Rocky Hill, CT 06067

www.conveylighting.com

info@conveylighting.com