

Details:

- Linkable straight sections with hidden connections allowing for end to end installation.
- Product is IP67 Rated for indoor and outdoor use.
- Multiple optics for various applications.

Features:

- Maximum 32.8' connection on a single power feed.
- Mounting via fixed clips, rotatable brackets and option glare shields.
- Power Leads and Connectors included at no charge based on your run specifications.

Lighting Features:

- Specy beam spread for the application.
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at www.conveylighting.com




Static White and RGBW Option Available

Applications:**Specifications:**

Average Power Consumption	5w(12"), 10w(24"), 18w(40"), 20w(48")
Voltage	24v DC
Binning	3 step
Sizing Available	12" / 24" / 40" / 48"
Lumens	Varies based on Optic. See Below
Max. Connection	32.8'
IP Rating	IP67 Standard

Lumens	12"/5w	24"/10w	40"/18w	20w/48"
30 Degree	130lm	270lm	500lm	570lm
45 Degree	270lm	540lm	910lm	1020lm
60 Degree	260lm	510lm	830lm	930lm
120 Degree	260lm	510lm	830lm	930lm

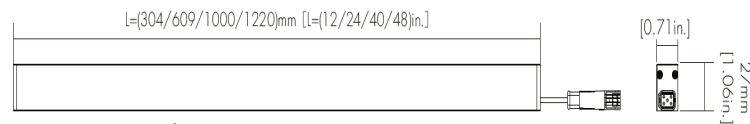Dimensions:**Ordering Information:**

Example:

COSMO-GRAZE-RGB-DMX-12-W24K-24V-15D-ADJ60D

Model:	Length:	CCT(White):	Voltage:	Optic:	Mounting:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

**COSMO-GRAZE-
RGB-DMX**

12 12"
24 24"
40 40"
48 48"

W24K 2400K,
W27K 2700K,
W30K 3000K,
W35K 3500K,
W40K 4000K,
W50K 5000K,
W65K 6500K,


24 24v

30 Degrees
45
60
120


CLIP Mounting Clip
ADJ60 Adjustable 60D
ADJ90 Adjustable 90D
ADJ180 Adjustable 180D
GLRFX Glare Shield, Fixed
GLRADJ Glare Shield, Adjustable

Mounting Options:


CLIP (Fixed Surface Clip)

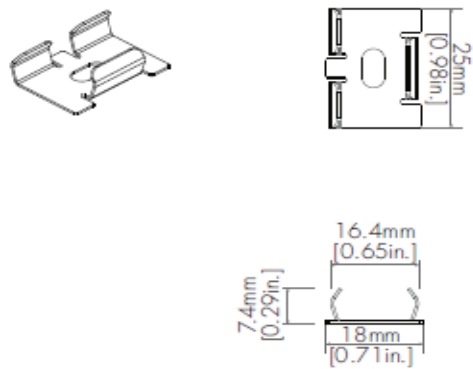


ADJ60 (Adjustable to 60 Degrees)

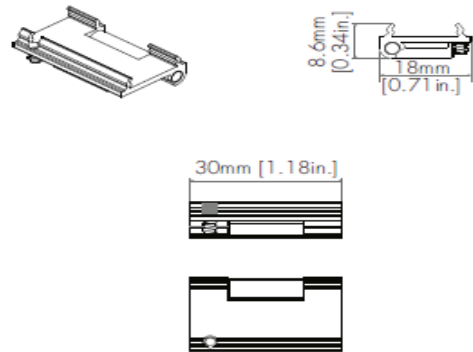


ADJ90 (Adjustable to 90 Degrees)

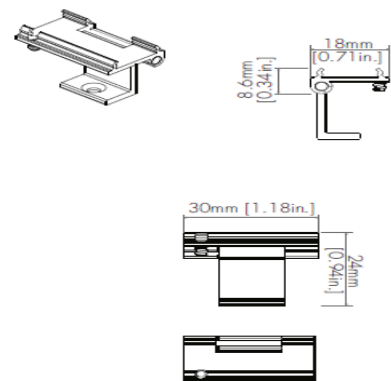

ADJ180 (Adjustable to 90 Degrees)

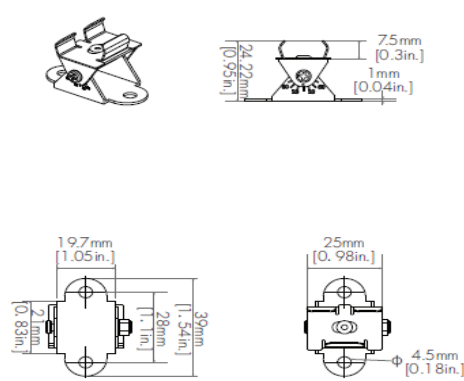

GLRFX (Fixed Glare Shield)

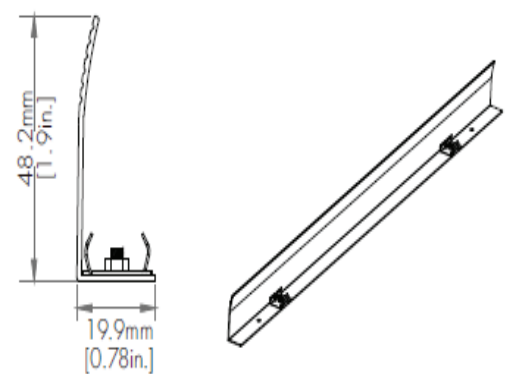

GLRADJ (Adjustable to 90 Degrees Glare Shield)

