




Visit Our Website

convey™


Pendant

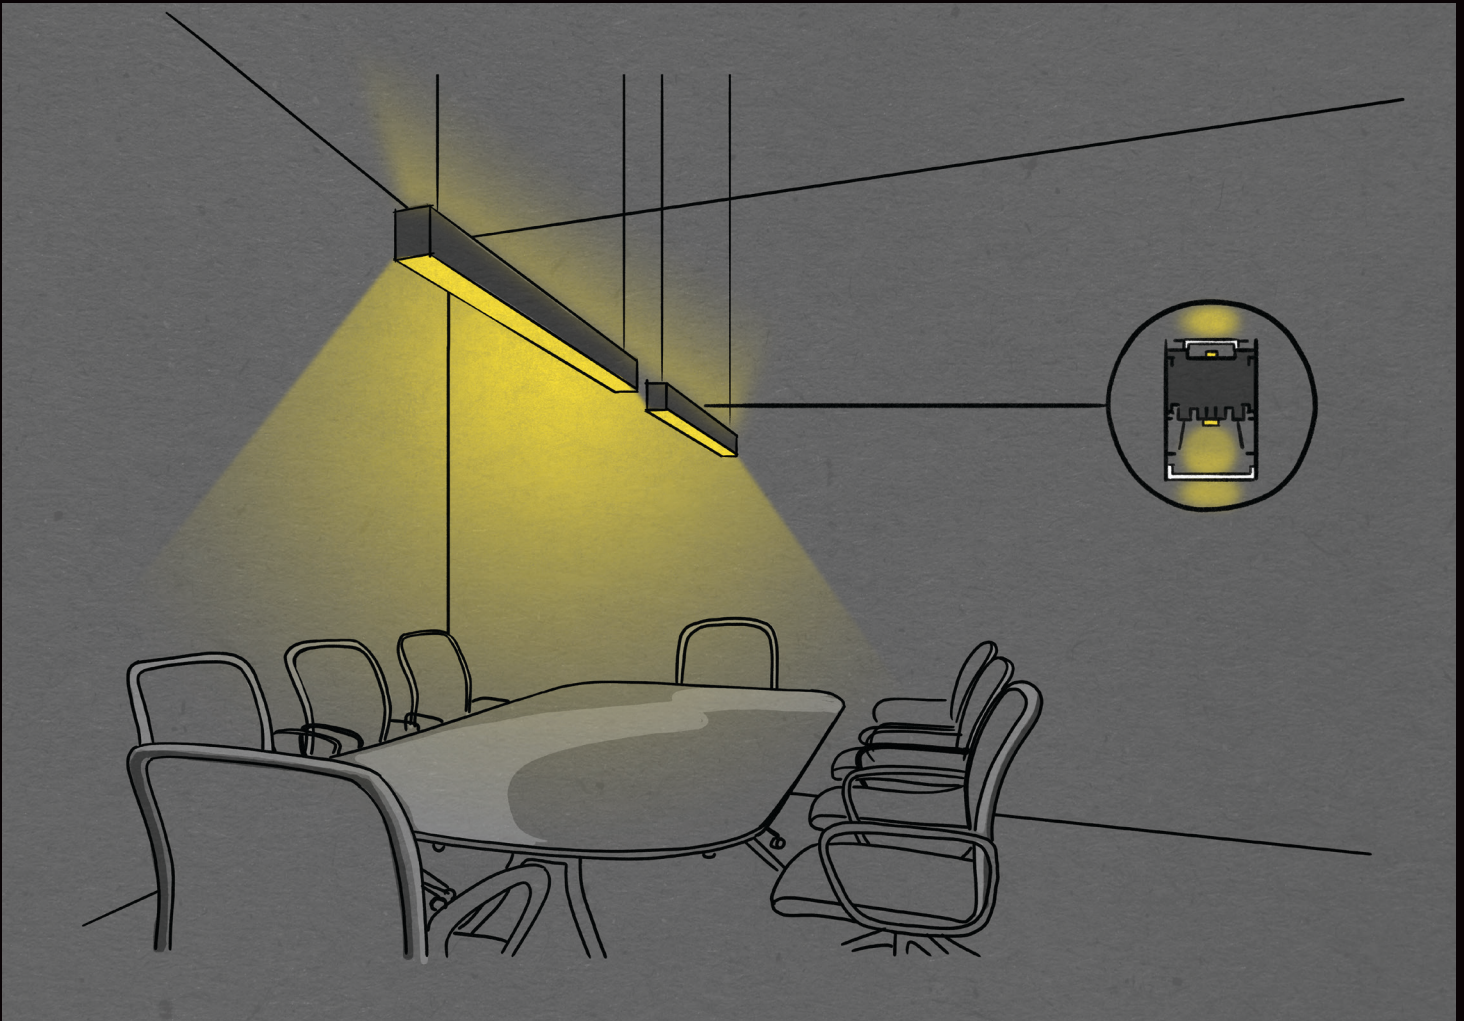

Base Extrusion

Light Engines

BE4-1S



L1

- 1.8W/ft 200 Lm/ft
53' max run
- 2.9W/ft 213 Lm/ft
34' max run
- 4.4W/ft 523 Lm/ft

L2

- 1.3W/ft 178 Lm/ft
- 2.6W/ft 356 Lm/ft
- 3.6W/ft 367 Lm/ft
- 4.5W/ft 519 Lm/ft
- 6.4W/ft 620 Lm/ft
- 9.1W/ft 942 Lm/ft
- 10.9W/ft 1128 Lm/ft
8' Max Run

L3

- 3W/ft 525 Lm/ft
- 6W/ft 1050 Lm/ft
- 9W/ft 1575 Lm/ft
- 12W/ft 2100 LM/ft
8' max run

L4

- 13.2W/ft - 2070 Lm/ft
7' Max Run

Transformers



T/PSU-UNV

Static White + Warm Dim

Triac/ELV/0-10V

30W, 60W, 96W, 150W,
300 W, 2x96W, 3x96W,
and 4x96W Available



T/PSU-TW2

Tunable White

Dual 0-10V

96W Available



T/PSU-DALI

Static + Tunable White

Dali

96W Available



T/PSU-DMX

Static, Tunable White,
RGB, RGBW, and RGBTW

DMX

100W, 2x100W, and
3x100W Available



T/PSU-ND

Non-Dim or Casambi

Non-Dimmable

100W Available

Static White Light Available in 1800K, 2200K, 2400K, 2700K, 3000K, 3500K, and 4000K.
Various Tunable White, Warm Dim, RGBW, Wet-rated, Pixel, and COB versions are also available.
16' Max Run unless otherwise noted.