

Details:

- Bendable LED profile - Top Bend (Not Dual Axis or Side Bend)
- Standard product is IP65 Rated for indoor and outdoor use.
- *Dot* Free and Dimmable.

Features:

- Cut Segments 0.66ft
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 85CRI Standard
- TM-30 data available at www.conveylighting.com



Also available in Colors and Side Bend - Contact Factory for Details


Feed Options:

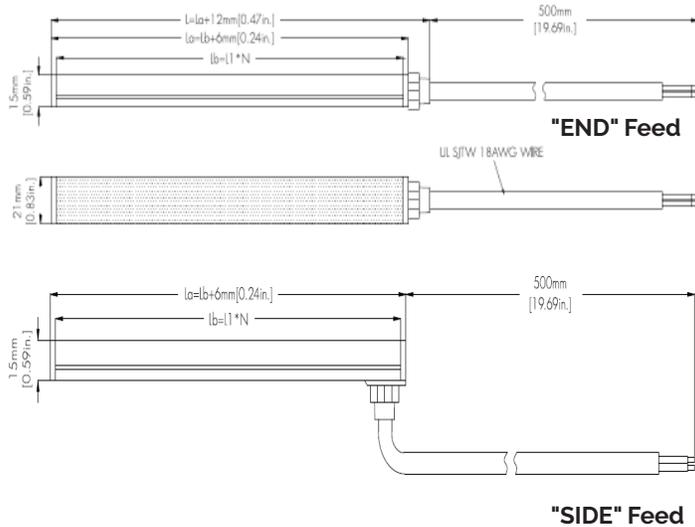

Specifications:

Average Power Consumption	4.2w per Foot
Voltage	120v AC - No Driver
Binning	3 step
Cut Increment	0.66ft Increments
Lumens @ 4000k / 90CRI	216lm/ft
Max. Connection	110-120v - 164ft
IP Rating	IP65 Standard
Beam Angle	120 Degrees

Sectional



Ordering Information:

Example:
FLEX4W-SW-TB-AC-30-AC120-E-MC

Model:	CCT(White):	Voltage:	Feed Type:	Mounting:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
FLEX4W-SW-TB-AC	27 2700K,90CRI 30 3000K,90CRI 35 3500K,90CRI 40 4000K,90CRI 50 5000K,90CRI 65 6500K,90CRI	AC120 120v AC	E End Feed S Side Feed PE Plug End Feed PS Plug Side Feed	MC Clip MB Bracket MPS Profile Straight MPF Profile Flexible

1800k and 2400k available as special order
Minimum purchase may apply

Mounting:

