

LinearLight 2-TW-PRO-4.6


CONVEY

Details:

- LinearLight 2-TW-PRO-4.6 is a small profile, versatile, tunable white LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-TW-PRO-4.6 is provided in an output up to 574lm/ft. Three CCT LED strip closely follows the Black Body Curve.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 2.46" increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

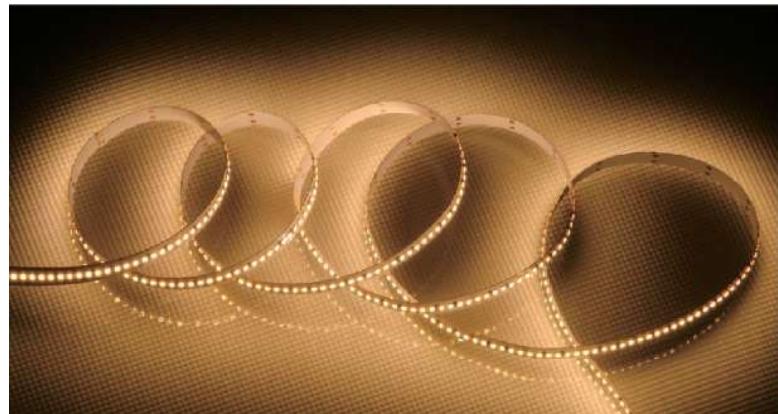

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com

Profile:

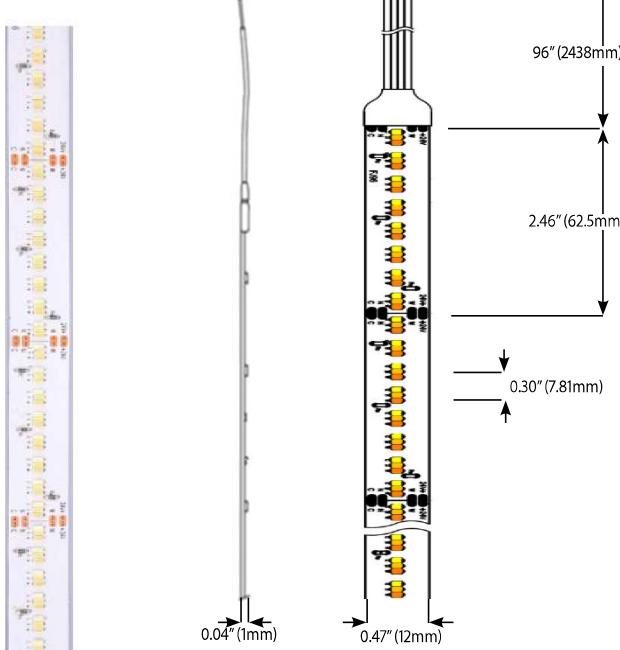

Specifications:

Average Power Consumption	4.6W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.46"
Diodes per foot	117
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.42"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @ 90 CRI	155	101
3000K @ 98CRI	182	118
6500K @ 98CRI	237	154

Ordering Information:

Example:

L2-TW-PRO-4.6-18/30/65

Model:

CCT:

Length:

Transformer/PSU

- - -

L2-TW-PRO-4.6 4.6W/ft. 18/30/65 1800K/3000K/6500K

1'-16'
C SPECIFY
CUSTOM

TXXX SPECIFIED
SEPARATELY