

Details:

- LinearLight 2-TW SPI is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-TW SPI is provided an average output of 260lm/ft
- Stocked in 16.5' lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:

- Factory cut lengths to 1.97" Increments with diode free illumination.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Suitable for all BE2 Profiles.
- 96" Power Leads standard.

Lighting Features:


- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty



Specifications:

Average Power Consumption	4.4W/ft.
Voltage	24V/dc - Use IC WS2811 Controller
Binning	3 step
Cut Increment	1.97"
Diodes per foot	36
Max. Run	16.5ft (Full Output).
IP Rating	IP20 (Dry location) or IP65 (Wet)
Dimensions	0.47"W x 0.08"H (* See IP65 Note)

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
ALL ON @90CRI	260	57

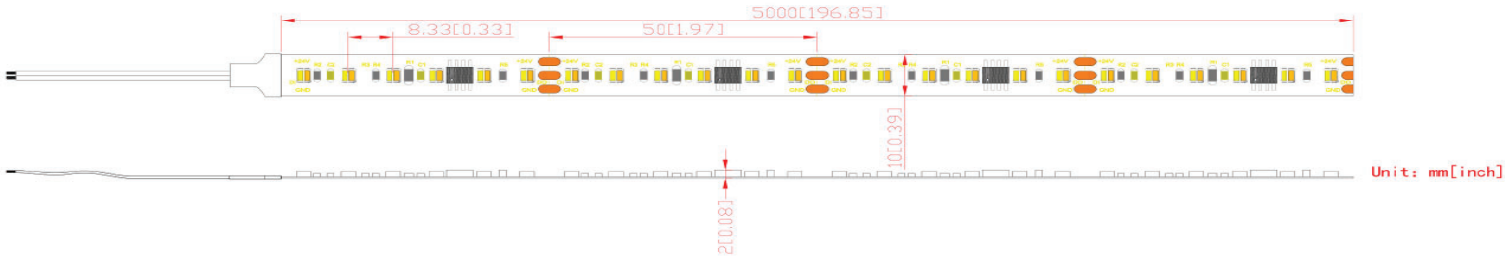

Ordering Information:

Example:  
L2-TW-SPI-4.4-27/65-6.5'

Model:

CCT:

Length:

Transformer/PSU:

L2-TW-SPI 4.4W/ft. 27/65 2700K/6500K 16.5' C ROLL CUSTOM TXXX SPECIFIED SEPARATELY

L2W-TW-SPI

See Note on IP65 (\*)

(\*) L2W-TW SPI IP65 Version dimensions increase to 0.47"W x 0.16"H