

Sheetled - RGB+Tunable White

CONVEY

Details:

- Flat Panel and Bendable LED Sheets for Backlighting Applications.
Not Recommended for direct view applications.
Flexible for various applications and field cuttable with scissors.


Features:

- Cut Segments in 4.72" x 1.58" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com

Also available in Static White, Tunable and RGBW Options

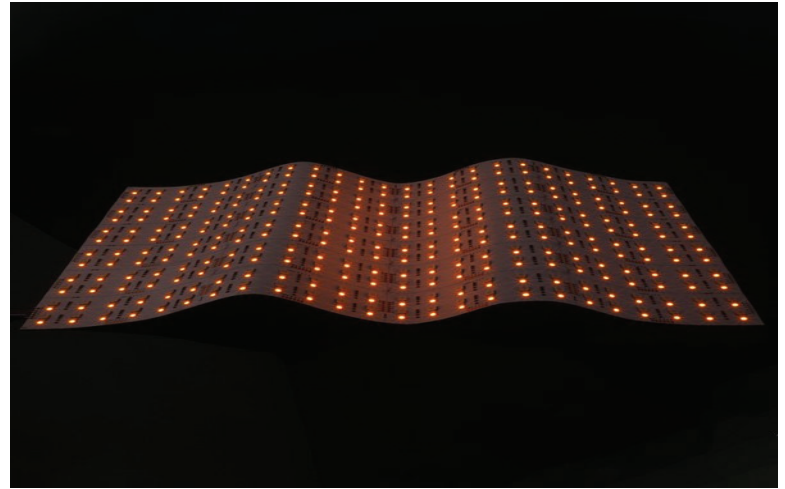

Dimensions:

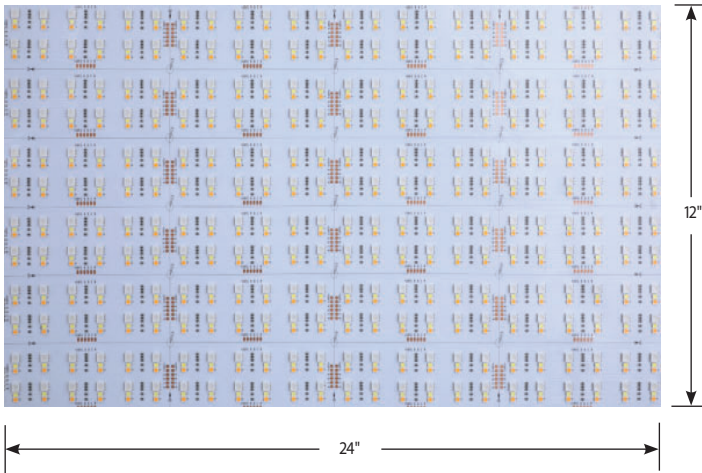

Specifications:

Average Power Consumption	20w/40w/60w/80w Per 12"x24" Sheet
Voltage	24V/dc
Binning	3 step
Cut Increment	6 LED Sections (4.72"x1.58")
Height with XH Connector	0.31"
Max. Connection	240w / 10amp @ 24v
IP Rating	IP20 or IP54 Options
Beam Angle	120 Degrees

	Lumen Output (lm/ft2.)
Red Only	410
Green Only	825
Blue Only	210
Warm Only	1325
Cool Only	1460
All Colors Combined	3390

Data Based on 80w Sheet

20w x 0.25
40w x 0.50
60w x 0.75

Ordering Information:

Example:
SHEET-RGBTW-30-60-IP20

Model:



CCT(White):



Wattage:



Rating:



SHEET-RGBTW

27 2700K, 90CRI
30 3000K, 90CRI
35 3500K, 90CRI
40 4000K, 90CRI
50 5000K, 90CRI
65 6500K, 90CRI


20 20w Per 12x24
40 40w Per 12x24
60 60w Per 12x24
80 80w Per 12x24

IP20 Dry Location
IP54 Damp Location

Power Supply Data Sheet
T-PSU-DMX (5 Channel)
Universal Voltage 24v Driver with
built in DMX Encoder.

Warm LED is standard at 1800k
Custom Sheets available - example 35k+65k

Feed and Connector (Included)



"XH" Connector for secure connections



LM-80

