

## Details:

- Flexible Top Bendable LED RGBW grazer/washer with multiple beam spreads for a variety of applications.
- Standard product is IP67 Rated for indoor and outdoor use.

## Features:


- Factory cut lengths to 6.56" increments
- Mounting via adhesive tape or clips. 3M (5604A) red adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.

## Lighting Features:

- 40° and asymmetric 40°x45° beam spreads available
- 50,000hr Life (L70) Indoors and 36,000hr Outdoors
- 5 year warranty (Indoor), 3 year (Outdoor)
- 90CRI Standard
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)




## Profile:

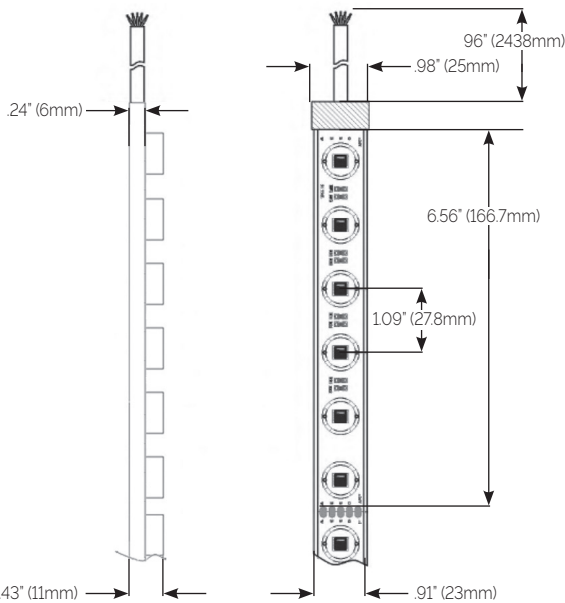

**Mounting Clips**  
(1) clip per 3' recommended

## Specifications:

Average Power Consumption	7W per Foot
Voltage	24V DC
Binning	3 step
Cut Increment	6.56"
Lumens @ 3000K / 90CRI	R: 70lm/ft., G: 140lm/ft., B: 30lm/ft., W: 160lm/ft.
Max. Connection	24V (16.4')
IP Rating	IP67 Standard
Beam Angle	40°, 40°x45° asymmetric

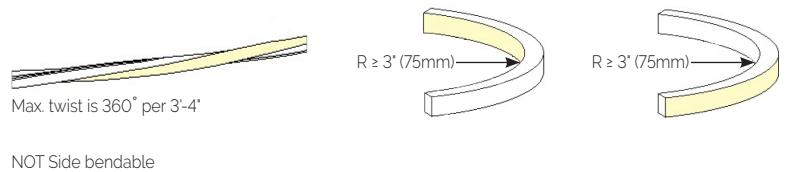

## Ordering Information:

Example:  
FLEX-W-RGBW7-30-30-24-MC

Model:	CCT(White):	Beam Angle:	Voltage:	Mounting:	Transformer/PSU:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>FLEX-W-RGBW7</b>	<b>27</b> 2700K, 90CRI <b>30</b> 3000K, 90CRI <b>35</b> 3500K, 90CRI <b>40</b> 4000K, 90CRI <b>50</b> 5000K, 90CRI <b>65</b> 6500K, 90CRI	<b>40</b> 40° <b>ASY</b> 40°x45°	<b>24</b> 24VDC	<b>MC</b> Clips	<b>TXXX</b> SPECIFIED SEPARATELY

2700K LLF: .95  
3500K LLF: 1.0  
4000K/5000K/6500K LLF: 1.05  
2200K and 2400K available as special order  
Minimum purchase may apply

101 Hammer Mill Rd.  
Rocky Hill, CT 06067

[www.conveylighting.com](http://www.conveylighting.com)

[info@conveylighting.com](mailto:info@conveylighting.com)

