

### Details:

- LinearLight 2W-SW2.6 is a small profile, IP68 wet listed LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-SW2.6 is provided in outputs ranging from 289lm/ft. to 352lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

### Physical Features:


- Factory cut lengths to 1.97" Increments.
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

### Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



### Profile:

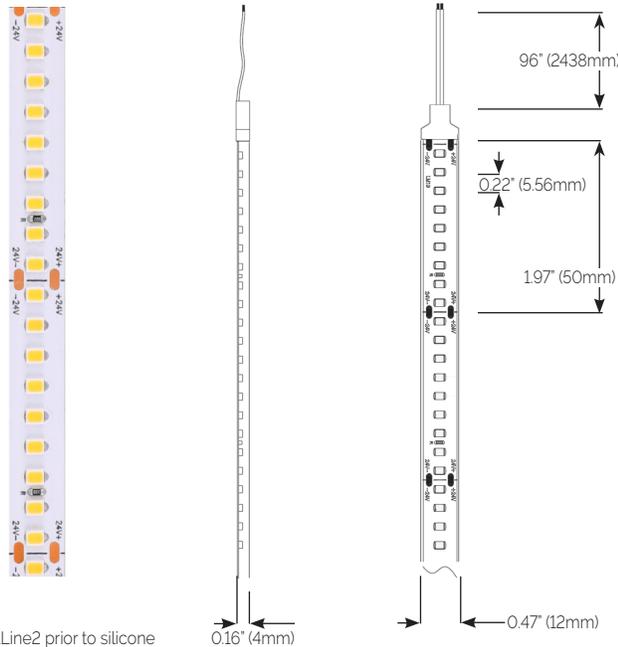

\*Image of LightLine2 prior to silicone injection process for IP68 rating

### Specifications:

Average Power Consumption	2.6W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	55
Max. Run	16ft.
IP Rating	IP68 (Class II wet location)
Dimensions	0.47"W x 0.16"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2200K @90CRI	289	111
2400K @95CRI	304	117
2700K @98CRI	320	123
3000K @98CRI	334	129
3500K @98CRI	357	135
4000K @98CRI	357	135

### Ordering Information:

Example:  
L2W-SW2.6-30-32'

Model:	CCT:	Length:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>L2W-SW2.6</b> 2.6W/ft.	<b>22</b> 2200K, 90CRI <b>24</b> 2400K, 95CRI <b>27</b> 2700K, 98CRI <b>30</b> 3000K, 98CRI <b>35</b> 3500K, 98CRI <b>40</b> 4000K, 98CRI	<b>1'-16'</b> SPECIFY <b>C</b> CUSTOM	<b>TXXX</b> SPECIFIED SEPARATELY