

Details:

- LinearLight 3-SW9.0 is a medium profile, versatile, high efficacy LED strip with best-in-class CRI available for a variety of applications. LinearLight 3-SW9.0 is provided in outputs ranging from 1228lm/ft. to 1575lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.97" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE3 or BE4 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty



Profile:

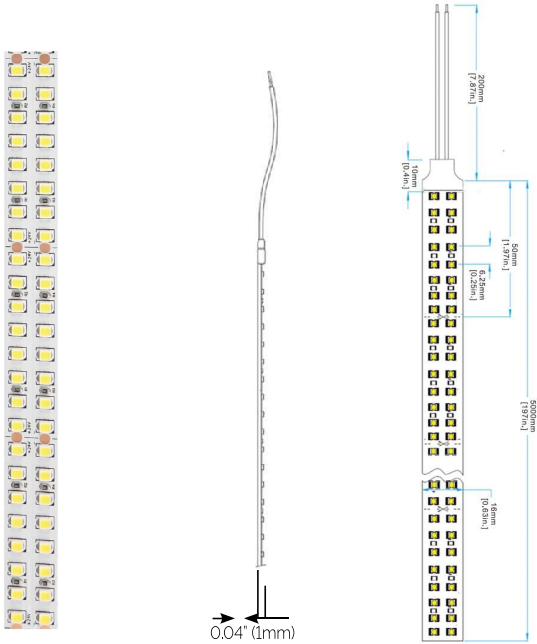

Specifications:

Average Power Consumption	9.0W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	96
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.63"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	1228	136
2200K @90CRI	1291	144
2400K @95CRI	1323	147
2700K @98CRI	1386	154
3000K @98CRI	1417	157
3500K @98CRI	1496	166
4000K @98CRI	1575	175

Ordering Information:

Example:
L3-SW9.0-30-16'

Model: - CCT: - Length: - Transformer/PSU:

L3-SW9.0 9.0W/ft. **18** 1800K, 90CRI **1'-16'** SPECIFY CUSTOM **TXXX** SPECIFIED SEPARATELY

22 2200K, 90CRI **C** **24** 2400K, 95CRI **27** 2700K, 98CRI **30** 3000K, 98CRI **35** 3500K, 98CRI **40** 4000K, 98CRI