

Details:

- LinearLight 2-SW10.9 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW10.9 is provided in outputs ranging from 1018lm/ft. to 1240lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.31" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

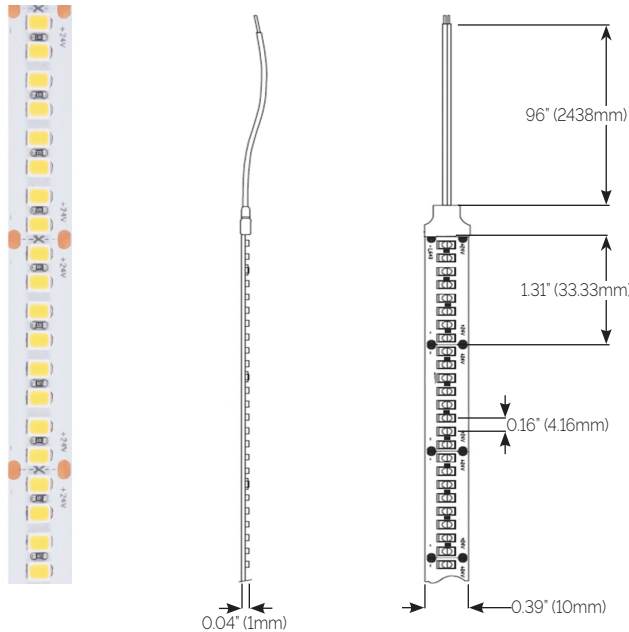

Specifications:

Average Power Consumption	10.9W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.31"
Diodes per foot	73
Max. Run	8ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.39"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	1127	103
2200K @90CRI	1018	93
2400K @95CRI	1072	98
2700K @98CRI	1128	103
3000K @98CRI	1178	108
3500K @98CRI	1240	114
4000K @98CRI	1240	114

Ordering Information:

Example:
L2-SW10.9-30-32'

Model:	CCT:	Length:	Transformer/PSU
L2-SW10.9 10.9W/ft.	18 1800K, 90CRI 22 2200K, 90CRI 24 2400K, 95CRI 27 2700K, 98CRI 30 3000K, 98CRI 35 3500K, 98CRI 40 4000K, 98CRI	1'-16' C SPECIFY CUSTOM	TXXX SPECIFIED SEPARATELY