

LinearLight 2W-SW10.9 (WET)

CONVEY

Details:

- LinearLight 2W-SW10.9 is a small profile, IP68 wet listed LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-SW10.9 is provided in outputs ranging from 916lm/ft. to 1116lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.31" Increments.
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

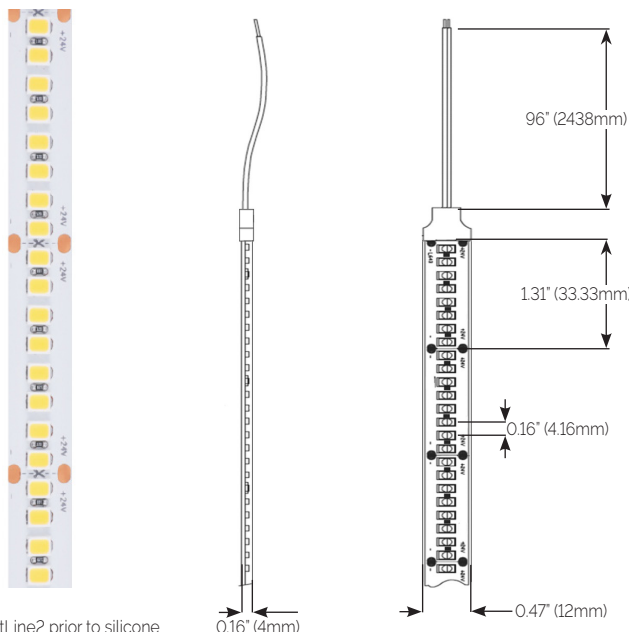

*Image of LightLine2 prior to silicone injection process for IP68 rating

Specifications:

Average Power Consumption	10.9W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.31"
Diodes per foot	73
Max. Run	8ft.
IP Rating	IP68 (Class II wet location)
Dimensions	0.47"W x 0.16"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2200K @90CRI	916	84
2400K @95CRI	965	88
2700K @98CRI	1015	93
3000K @98CRI	1060	97
3500K @98CRI	1116	103
4000K @98CRI	1116	103

Ordering Information:

Example:
L2W-SW10.9-30-32'

Model: - CCT: - Length: - Transformer/PSU:

L2W-SW10.9 10.9W/ft.

22 2200K, 90CRI
24 2400K, 95CRI
27 2700K, 98CRI
30 3000K, 98CRI
35 3500K, 98CRI
40 4000K, 98CRI

1'-16'
C SPECIFY
 CUSTOM

TXXX SPECIFIED
 SEPARATELY



LM-80

