

Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free


Features:

- Cut Segments in 1.97"
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at www.conveylighting.com

Also available in Static White, RGB and Warm Dim Options

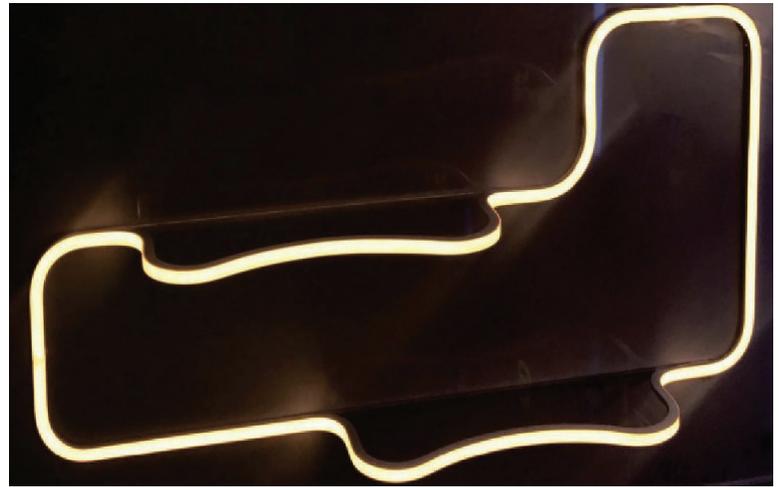


Feed Options:

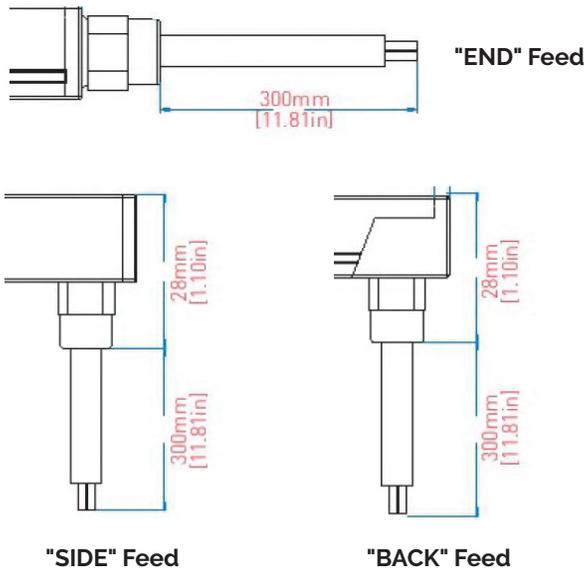

Specifications:

| | |
|---------------------------|---------------------------------|
| Average Power Consumption | 4.27w per Foot (Based on 4000k) |
| Voltage | 24v DC |
| Binning | 3 step |
| Cut Increment | 1.97" |
| Lumens @ 4000k / 90CRI | 204lm/ft |
| Max. Connection | 16.4' |
| IP Rating | IP67 Standard |
| Beam Angle | 120 Degrees |

Sectional




Ordering Information:

Example:
FLEX2-5W-TW-27/60-24-S-MPF

| | | | | |
|----------------------|--|----------------------|---|---|
| Model: | Tunable White: | Voltage: | Feed Type: | Mounting: |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| FLEX2-5W-TW | 27/60 2700K-6500K 18/40 1800K-4000K | 24 24v DC | E End Feed S Side Feed B Back Feed | MC Clip MB Bracket MPS Profile Straight MPF Profile Flexible |

Mounting:

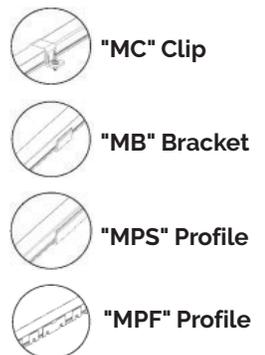

Special CCT mixing available
ie: 1800k/3500k
Minimums may apply