LinearLight L2W-WD4.4 (WET)

CONVEY

Details:

• LinearLight 2W-WD4.4 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-WD4.4 is provided an output of 330lm/ft @ 3000k
• Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:

• Factory cut lengths to 2.19" Increments.
• 3M (*300LSE*) yellow adhesive tape attached on backside, standard
• Complete factory assembly with any Series BE2 Profiles.
• 96" Power Leads

Lighting Features:

• 120° beam spread
• 50,000hr. Life (L70)
• 5 year warranty
• TM-30 data available at www.conveylighting.com

Profile:

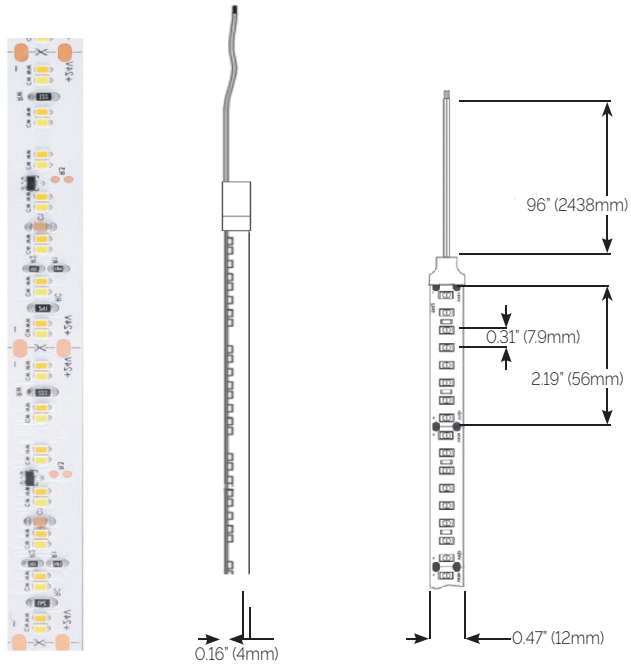

Specifications:

Average Power Consumption	4.4W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.19"
Diodes per foot	76
Max. Run	16ft.
IP Rating	IP68 (wet location)
Dimensions	0.47"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
3000K	330	75

Ordering Information:

Example:
L2W-SW4.4-18/30-32'

Model:		CCT:		Length:		Transformer/PSU
[ ]	–	[ ]	–	[ ]	–	[ ]
L2W-WD4.4 4.4W/ft.		**18** 1800K, 90CRI **30** 3000K,98CRI **22** 2200K, 90CRI **30** 3000K,98CRI		**1'-16'** SPECIFY **C** CUSTOM		**TXXX** SPECIFIED SEPARATELY

LM-80 1 BIN/3-STEP

Convey Lighting
101 Hammer Mill Road,
Rocky Hill, CT 06067

www.conveylighting.com

info@conveylighting.com
(866)-CONVEYL