

Details:

- LinearLight 2-RGBW5 is a small profile, versatile RGBW LED strip for a variety of applications. LinearLight 2-RGBW5 is provided in an output of 274lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 3.94" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

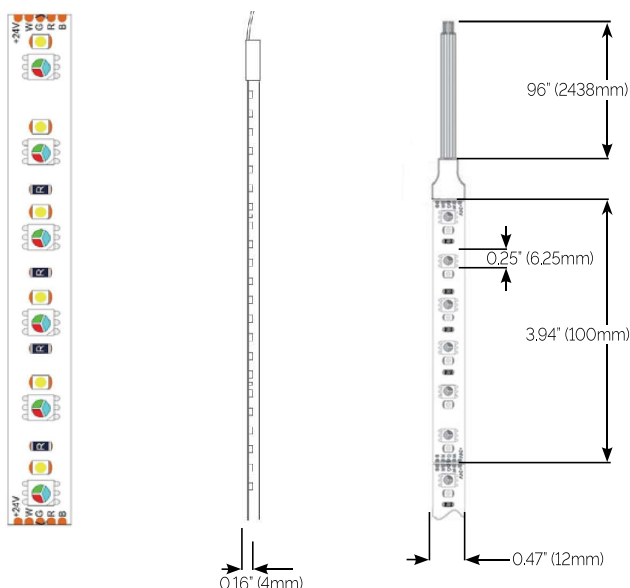

Specifications:

Average Power Consumption	5W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	3.94"
Diodes per foot	36
Max. Run	16ft.
IP Rating	IP68 (Wet location)
Dimensions	0.47"W x 0.09"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2400K @95CRI	274	55
2700K @98CRI	274	55
3000K @98CRI	274	55
3500K @98CRI	274	55
4000K @98CRI	274	55

Ordering Information:

Example:
L2-RGBW5-30-32'

Model: - CCT: - Length: - Transformer/PSU:

L2W-RGBW5 5W/ft. **24** 2400K, 95CRI **1'-16'** SPECIFY CUSTOM **TXXX** SPECIFIED SEPARATELY

27 2700K, 98CRI
30 3000K, 98CRI
35 3500K, 98CRI
40 4000K, 98CRI



LM-80

