

Details:

- LinearLight 1-SW2.9 is a versatile LED strip in our smallest profile with best-in-class CRI available for a variety of applications. LinearLight 1-SW2.9 is provided in outputs ranging from 175lm/ft. to 213lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1/64" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE1 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

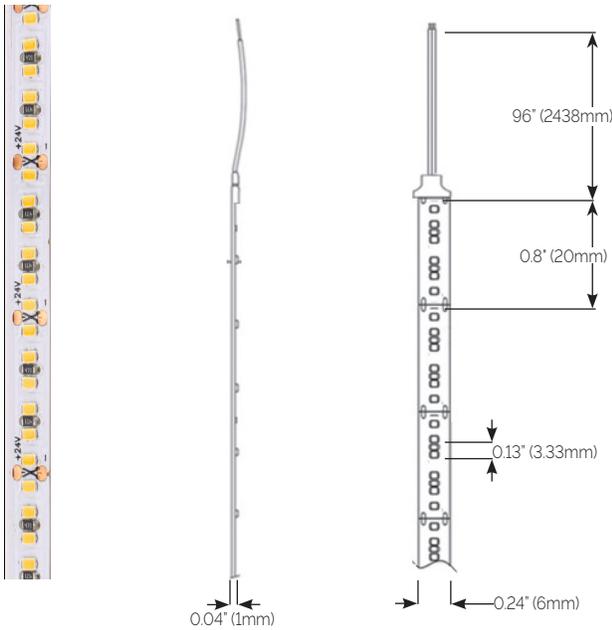

Specifications:

Average Power Consumption	2.9W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	0.8"
Diodes per foot	91
Max. Run	16.4ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.2"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	194	67
2200K @90CRI	175	60
2400K @95CRI	184	63
2700K @98CRI	194	67
3000K @98CRI	203	70
3500K @98CRI	213	73
4000K @98CRI	213	73

Ordering Information:

Example:
L1-SW2.9-30-12'

Model: - CCT: - Length: - Transformer/PSU:

L1-SW2.9 2.9W/ft.

18 1800K, 90CRI
22 2200K, 90CRI
24 2400K, 95CRI
27 2700K, 98CRI
30 3000K, 98CRI
35 3500K, 98CRI
40 4000K, 98CRI

1'-16' SPECIFY
C CUSTOM

TXXX SPECIFIED
 SEPARATELY