

Details:

- LinearLight 2-RGBTW is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-RGBTW is provided with a maximum output of 12.1w and 938 lumens per foot.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:

- Factory cut lengths to 3.94" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Suitable for all BE2 Profiles.
- 96" Power Leads standard.

Lighting Features:

- 150° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com




Profile:



Specifications:

Average Power Consumption	12.1W/ft. (all colors 100%)-See Below
Voltage	24V/dc
Binning	3 step
Cut Increment	3.94"
Diodes per foot	109
Max. Run	16ft.
IP Rating	IP20 (Dry location) or IP67 (Wet)
Dimensions	0.47"W x 0.07"H (* See IP67 Note)

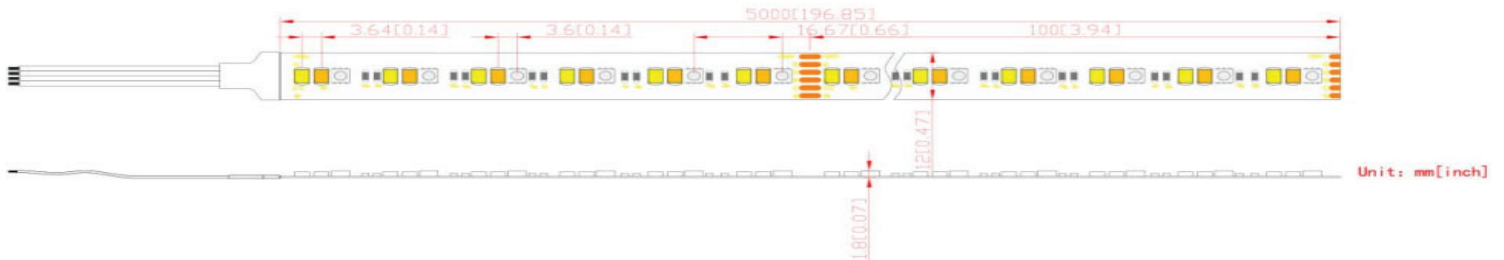

Ordering Information:

Example:
L2-RGBTW12.1-27/65-14'

Model: - CCT: - Length: - Transformer/PSU:

L2COB-RGBTW12.1 5.5W/ft. **27/65** 2700K-6500K **1'-16'** SPECIFY CUSTOM **TXXX** SPECIFIED SEPARATELY

L2COBW-RGBTW12.1

See Note on IP67

Lumen Values per Color:

RED - 53lm/ft
GREEN - 136lm/ft
BLUE - 31lm/ft
2700k - 340lm/ft
6500k - 378lm/ft

RGB Wattage all on - 4.5w/ft
2700k - 3.8w/ft
6500k - 3.8w/ft

(*) L2COBW IP67 Version dimensions increase to 0.55"W x 0.16"H



LM-80

