

Details:

- LinearLight 1-TW2.9 is a versatile tunable white LED strip in our smallest profile, with best-in-class CRI available for a variety of applications. Linear Light 1-TW2.9 is provided in an output of 200lumens/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 0.8" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE1 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

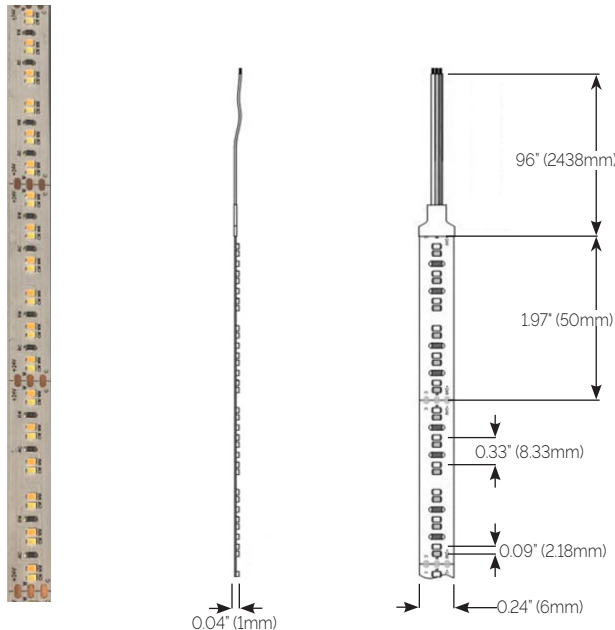

Specifications:

Average Power Consumption	2.9W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	0.8"
Diodes per foot	91
Max. Run	33ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.24"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2700K, 6500K @98CRI	200	69
1800K@90CRI, 4000K @98CRI	200	69

Ordering Information:

Example:
L1-TW2.9-30-32'

Model: - CCT: - Length: - Transformer/PSU

L1-TW2.9 2.9W/ft. **27/65** 2700K/6500K **18/40** 1800K/4000K **1'-16'** SPECIFY **C** CUSTOM **TXXX** SPECIFIED SEPARATELY



LM-80

