

Details:

- LinearLight 1-WD2.9 is a versatile tunable white LED strip in our smallest profile, with best-in-class CRI available for a variety of applications. Linear Light 1-WD2.9 is provided in an output of up to 278 lumens/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 0.8" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE1 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

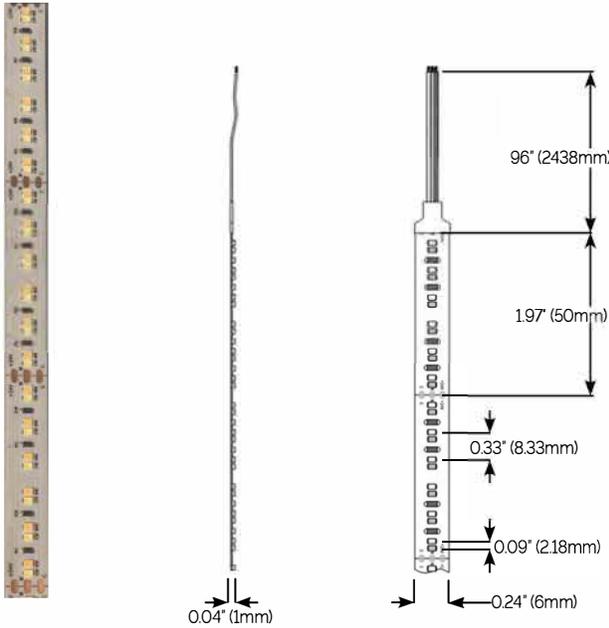

Specifications:

Average Power Consumption	2.9W/ft.	
Voltage	24V/dc	
Binning	3 step	
Cut Increment	0.8"	
Diodes per foot	91	
Max. Run	16ft.	
IP Rating	IP20 (Class II dry location)	
Dimensions	0.24"W x 0.04"H	
CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
3000K @90CRI	278	95
1800K@90CRI (Full Dim)	32	55

Ordering Information:

Example:
L1-WD2.9-30-12'

Model: - CCT: - Length: - Transformer/PSU:

L1-WD2.9 2.9W/ft. **18/30** 1800K/3000K **1'-16'** SPECIFY CUSTOM **TXXX** SPECIFIED SEPARATELY