Base Extrusion 1-3S Channel

Details:

 Surface Aluminum profile for use with Series L1 LED Engines. Stocked in 96" lengths but can be factory cut and assembled based on

project requirements.

Standard Options:

- Factory cut lengths to 1/8" Increments.
- · Complete factory assembly with any Series L1 LED Engines.
- 96" Power Leads

Custom Options:

- · Standard finishes Aluminum (Standard), White or Black as specials.
- RAL Finishes available "RAL"
- Factory applied color filters (Rosco)

WRITE BEAL

Cross Section: 21mm (0.83") 39") 0.

Profile:

Standard finish is Anodized Aluminum, White or Black as special order.

RAL Finishes available - Please specific Tiger Drylac # Example RAL9010-WHITE

RAL Finishes are quoted on a per project basis

Lenses:

Frosted - Slight Diffusion.


Opal - Maximum LED diffusion with a reduction in efficiency. Series L1 LED's allow for direct view applications.

Lenses snap into the profile and can be easily changed at any time.

End Cap (Pair) #EC

Accessories:

Ordering Information:

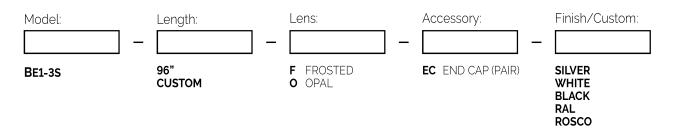

Example: BE1-3S-72"-O-EC-RAL#9010-WHITE-ROSCO#R08 PALE GOLD

