

LinearLight 2W-SW1.3 (WET)

CONVEY

Details:

- LinearLight 2W-SW1.3 is a small profile, IP68 wet listed LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-SW1.3 is provided in outputs ranging from 135lm/ft. to 177lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 3.94" Increments.
- LinearLight 2W-SW1.3 is compatible with Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

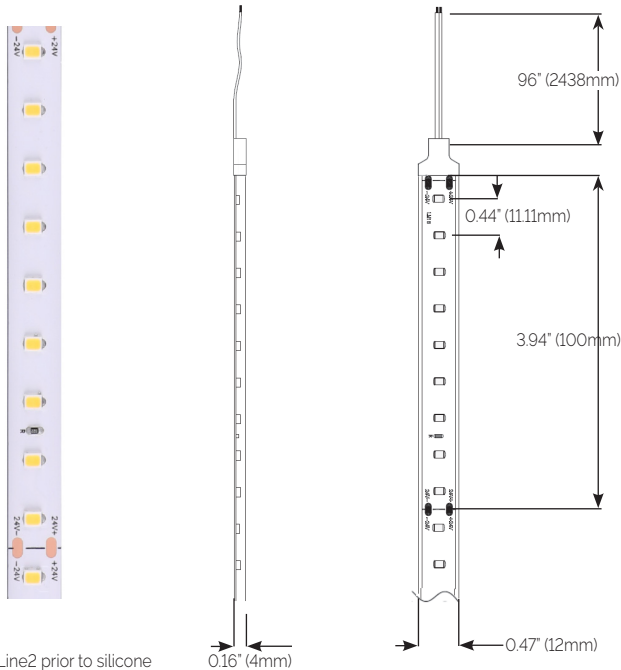

*Image of LightLine2 prior to silicone injection process for IP68 rating

Specifications:

Average Power Consumption	1.3W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	3.94"
Diodes per foot	27
Max. Run	16ft.
IP Rating	IP68 (Class II wet location)
Dimensions	0.47"W x 0.16"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2200K @90CRI	145	111
2400K @95CRI	152	117
2700K @98CRI	160	123
3000K @98CRI	167	129
3500K @98CRI	176	135
4000K @98CRI	176	135

Ordering Information:

Example:
L2W-SW1.3-30-32'

Model: - CCT: - Length: - Transformer/PSU:

L2W-SW1.3 1.3W/ft.

22 2200K, 90CRI
24 2400K, 95CRI
27 2700K, 98CRI
30 3000K, 98CRI
35 3500K, 98CRI
40 4000K, 98CRI

1'-16'
C SPECIFY
CUSTOM

TXXX SPECIFIED
SEPARATELY



LM-80

