

### Details:

- LinearLight 2W-SW6.1HE is a small profile, IP68 wet listed LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW6.1HE is provided in outputs up to 932lm/ft.
- Stocked in 22.9' lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

### Physical Features:


- Factory cut lengths to 1.31" Increments with run length up to 22.9'
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

### Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



### Profile:

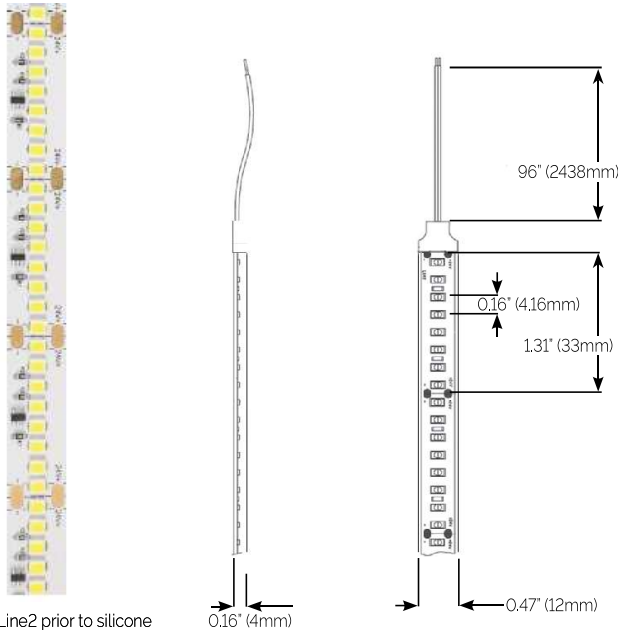

\*Image of LightLine2 prior to silicone injection process for IP68 rating

### Specifications:

Average Power Consumption	6.1W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.31"
Diodes per foot	73
Max. Run	22.9ft.
IP Rating	IP68 (Class II wet location)
Dimensions	0.47"W x 0.16"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	684	112
2200K @90CRI	713	117
2400K @95CRI	741	121
2700K @98CRI	774	127
3000K @98CRI	805	132
3500K @98CRI	838	137
4000K @98CRI	932	152

### Ordering Information:

Example:  
L2W-SW6.1HE-30-32'

Model:	CCT:	Length:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>L2W-SW6.1HE</b> 3.8W/ft.	<b>18</b> 1800K, 90CRI <b>22</b> 2200K, 90CRI <b>24</b> 2400K, 95CRI <b>27</b> 2700K, 98CRI <b>30</b> 3000K, 98CRI <b>35</b> 3500K, 98CRI <b>40</b> 4000K, 98CRI	<b>1'-16'</b> SPECIFY <b>C</b> CUSTOM	<b>TXXX</b> SPECIFIED SEPARATELY