

Details:

- LinearLight 2-SW SPI is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW SPI is provided an average output of 305lm/ft
- Stocked in 16.5' lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:

- Factory cut lengths to 3.94" Increments with diode free illumination.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Suitable for all BE2 Profiles.
- 96" Power Leads standard.

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty




Specifications:

Average Power Consumption	3.9W/ft.
Voltage	24V/dc - Use IC WS2811 Controller
Binning	3 step
Cut Increment	3.94"
Diodes per foot	36
Max. Run	16.5ft (Full Output).
IP Rating	IP20 (Dry location) or IP65 (Wet)
Dimensions	0.47"W x 0.08"H (* See IP65 Note)

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
4000k @90CRI	305	92

For 2700k reduce lumens by 10%

For 3000k/3500k reduce lumens by 5%

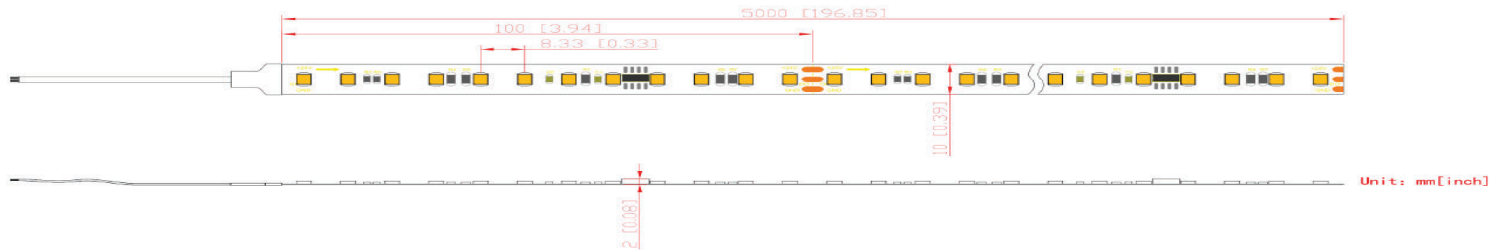

Ordering Information:

Example:
L2-SW-SPI-3.3-27-6.5'

Model:	CCT:	Length:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
L2-SW-SPI 3.3W/ft.	27 2700K 30 3000K 35 3500K 40 4000K	16.5' ROLL C CUSTOM	TXXX SPECIFIED SEPARATELY
L2W-SW-SPI			

See Note on IP65 (*)

(*) L2W-SW SPI IP65 Version dimensions increase to 0.47"W x 0.16"H