

Details:

- LinearLight 2W-SW6.4 is a small profile, IP68 wet listed LED strip with best-in-class CRI available for a variety of applications. LinearLight 2W-SW6.4 is provided in outputs ranging from 504lm/ft. to 614lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 2.46" Increments.
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

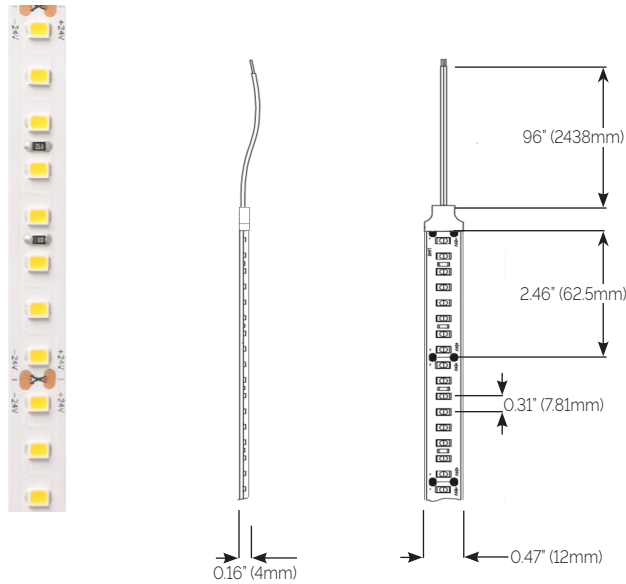

*Image of LightLine2 prior to silicone injection process for IP68 rating

Specifications:

Average Power Consumption	6.4W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.46"
Diodes per foot	39
Max. Run	16ft.
IP Rating	IP68 (Class II wet location)
Dimensions	0.47"W x 0.16"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2200K @90CRI	504	79
2400K @95CRI	530	84
2700K @98CRI	558	88
3000K @98CRI	592	92
3500K @98CRI	614	96
4000K @98CRI	614	96

Ordering Information:

Example:
L2W-SW6.4-30-32'

Model:	CCT:	Length:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
L2W-SW6.4 6.4W/ft.	22 2200K, 90CRI 24 2400K, 95CRI 27 2700K, 98CRI 30 3000K, 98CRI 35 3500K, 98CRI 40 4000K, 98CRI	1'-16' C SPECIFY CUSTOM	TXXX SPECIFIED SEPARATELY