

Sheeted - RGBW

Details:

- Flat Panel and Bendable LED Sheets for Backlighting Applications. Not Recommended to Cut with Scissors.


Features:

- Cut Segments in 4.72" x 1.58" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com

Also available in Static White, Tunable and RGB+Tunable Options

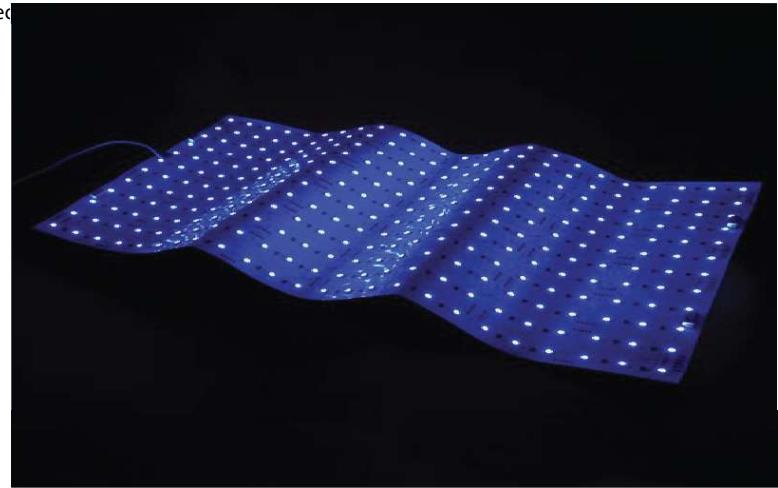

Dimensions:

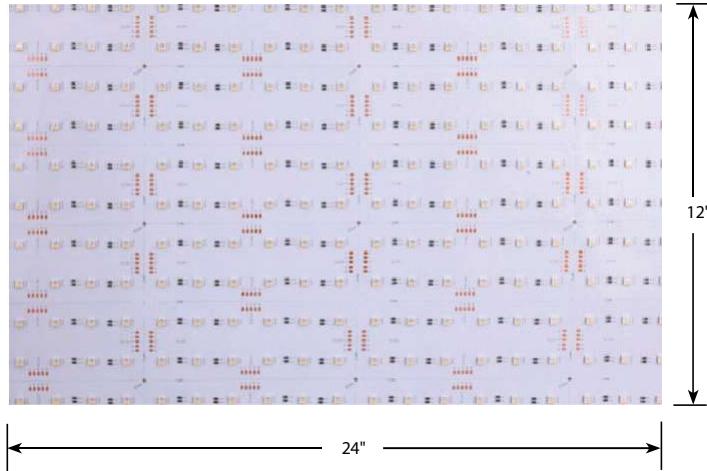

Specifications:

| | |
|---------------------------|-----------------------------------|
| Average Power Consumption | 20w/40w/60w/80w Per 12"x24" Sheet |
| Voltage | 24V/dc |
| Binning | 3 step |
| Cut Increment | 6 LED Sections (4.72"x1.58") |
| Height with XH Connector | 0.31" |
| Max. Connection | 240w / 10amp @ 24v |
| IP Rating | IP20 or IP54 Options |
| Beam Angle | 120 Degrees |

| CCT | Lumen Output (lm/ft2.) |
|---------------------|------------------------|
| White Only | 1260 |
| Red Only | 540 |
| Green Only | 1140 |
| Blue Only | 260 |
| All Colors Combined | 3200 |

Data Based on 80w Sheet

20w x 0.25
40w x 0.50
60w x 0.75

Ordering Information:

Example:

SHEET-RGBW-30-60-IP20


Model:

CCT(White):

Wattage:

Rating:

Feed and Connector (Included)



SHEET-RGBW

27 2700K, 90CRI
30 3000K, 90CRI
35 3500K, 90CRI
40 4000K, 90CRI

20 20w Per 12x24
40 40w Per 12x24
60 60w Per 12x24
80 80w Per 12x24

IP20 Dry Location
IP54 Damp Location

Power Supply Data Sheet

T-PSU-DMX (4 Channel)

Universal Voltage 24v Driver with

built in DMX Encoder.

"XH" Connector for secure connections



LM-80

