

## Details:

- LinearLight 2-SW4.5 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW4.5 is provided in outputs ranging from 429lm/ft. to 595lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 2.46" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

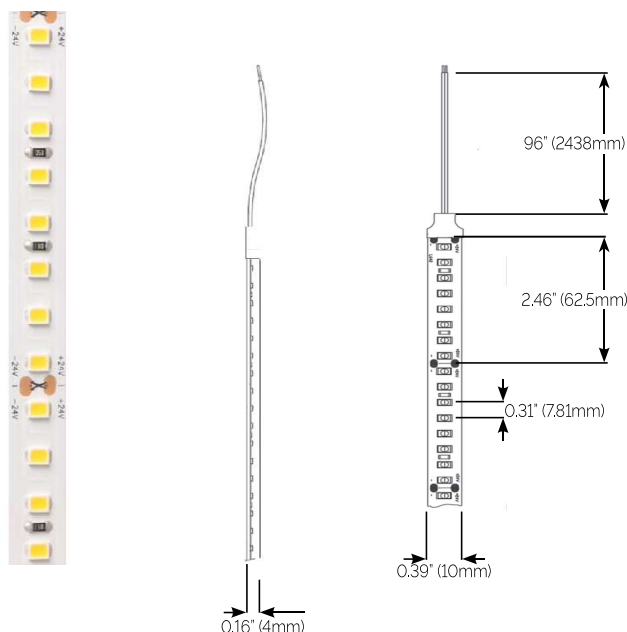

## Specifications:

Average Power Consumption	4.5W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	2.46"
Diodes per foot	39
Max. Run	16ft.
IP Rating	IP68 (Wet location)
Dimensions	0.39"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	429	97
2200K @90CRI	467	86
2400K @95CRI	487	90
2700K @98CRI	519	96
3000K @98CRI	547	101
3500K @98CRI	595	110
4000K @98CRI	595	110

## Ordering Information:

Example:  
L2W-SW4.5-30-32'

Model:	CCT:	Length:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>L2W-SW4.5</b> 4.5W/ft.	<b>18</b> 1800K, 90CRI <b>22</b> 2200K, 90CRI <b>24</b> 2400K, 95CRI <b>27</b> 2700K, 98CRI <b>30</b> 3000K, 98CRI <b>35</b> 3500K, 98CRI <b>40</b> 4000K, 98CRI	<b>1'-16'</b> <b>C</b> SPECIFY CUSTOM	<b>TXXX</b> SPECIFIED SEPARATELY



LM-80

