Cosmo Graze Series - RGBW

Details:

- · Linkable straight sections with hidden connections allowing for end to end installation.
- Product is IP67 Rated for indoor and outdoor use.
- Multiple optics for various applications.

Features:

- Maximum 32.8' connection on a single power feed.
- · Mounting via fixed clips, rotatable brackets and option glare shields.
- Power Leads and Connectors included at no charge based on your run specifications.

Lighting Features:

- Speciy beam spread for the application.
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard

Applications:

TM-30 data available at <u>www.conveylighting.com</u>





CONVE



Static White and RGBW-SPI Option Available

Specifications:

| Average Power Consumption | 5w(12"), 10w(24"), 18w(40"), 20w(48") | | |
|---------------------------|---------------------------------------|--|--|
| Voltage | 24v DC | | |
| Binning | 3 step | | |
| Sizing Available | 12" / 24" / 40' / 48" | | |
| Lumens | Varies based on Optic. See Below | | |
| Max. Connection | 32.8' | | |
| IP Rating | IP67 Standard | | |

| Lumens | 12"/5w | 24"/10w | 40"/18w | 20w/48" |
|------------|--------|---------|---------|---------|
| 30 Degree | 270lm | 540lm | 910lm | 1020lm |
| 45 Degree | 260lm | 510lm | 830lm | 930lm |
| 60 Degree | 260lm | 510lm | 830lm | 930lm |
| 120 Degree | 130lm | 270lm | 500lm | 570lm |


Ordering Information:

Example:

Dimensions:

COSMO-GRAZE-RGB-12-W24K-24V-15D-ADJ60D

L=(304/609/1000/1220)mm [L=(12/24/40/48)in.]

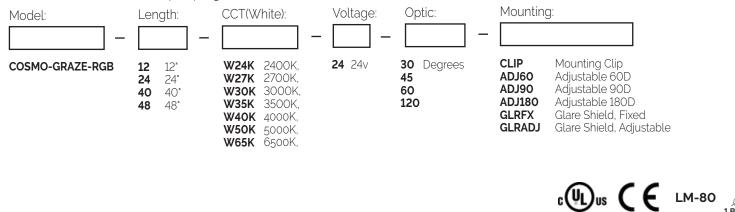

[0.71in.]



info@conveylighting.com


1 BIN/3-STEP

Mounting Options:

CLIP (Fixed Surface Clip)









ADJ60 (Adjustable to 60 Degrees)





ADJ90 (Adjustable to 90 Degrees)






ADJ180 (Adjustable to 90 Degrees)










GLRFX (Fixed Glare Shield)



GLRADJ (Adjustable to 90 Degrees Glare Shield)

