

Details:

- Flat Panel and Bendable LED Sheets for Backlighting Applications.
Not Recommended for direct view applications.
- Flexible for various applications and field cuttable with scissors.


Features:

- Cut Segments in 0.94"x0.94" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 90CRI Standard
- TM-30 data available at www.conveylighting.com

Also available in Static White, Tunable White, RGBW and RGB+TW options

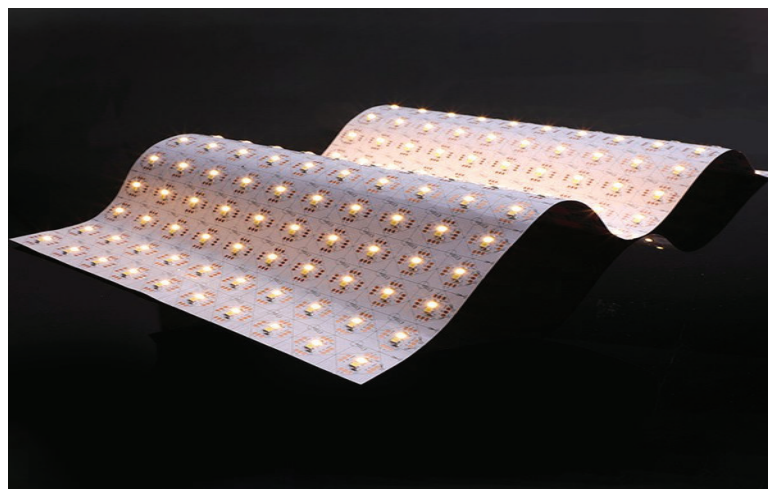

Dimensions:

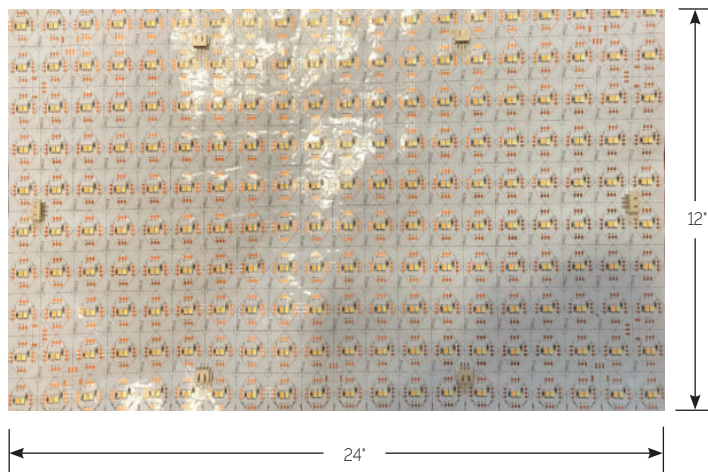

Specifications:

Average Power Consumption	20w/40w/60w/90w Per 12"x24" Sheet
Voltage	24V/dc
Binning	3 step
Cut Increment	1 LED Sections (0.94"x0.94")
Height with XH Connector	0.31"
Max. Connection	240w / 10amp @ 24v
IP Rating	IP20 or IP54 Options

Wattage	Lumen Output (lm/ft ²)
20w	1590
40w	3060
60w	4490
90w	6430

Data based on 3000k Output.

Ordering Information:

Example:
SHEET-WD-18/30-90-IP20 (18k to 30k)

Model:	CCT(White):	Wattage:	Rating:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
SHEET-WD	18/30 18-30K, 90CRI 22/30 22-30K, 90CRI	20 20w Per 12x24 40 40w Per 12x24 60 60w Per 12x24 90 90w Per 12x24	IP20 Dry Location IP54 Damp Location

Feed and Connector (Included)



"XH" Connector for secure connections



LM-80

