

Details:

- LinearLight 2-WD4.4 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-WD4.4 is provided an output of 330lm/ft @ 3000k
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 2.19" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



Profile:

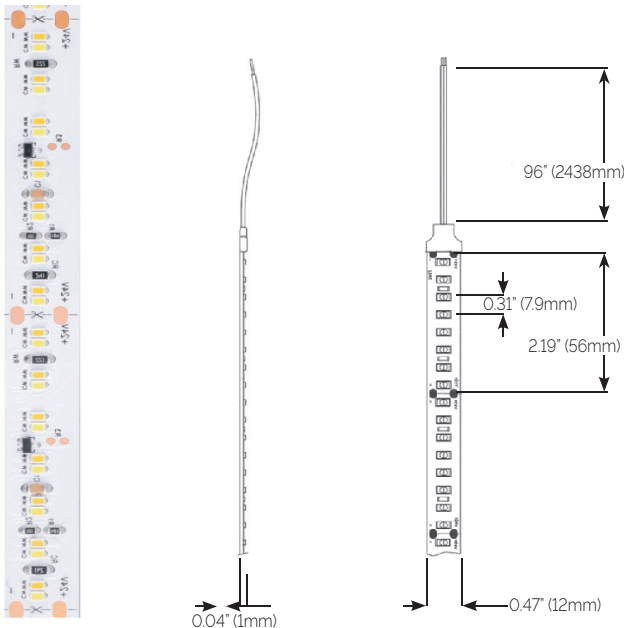

Specifications:

Average Power Consumption	4.4W/ft.	
Voltage	24V/dc	
Binning	3 step	
Cut Increment	2.19"	
Diodes per foot	76	
Max. Run	16ft.	
IP Rating	IP20 (Class II dry location)	
Dimensions	0.47"W x 0.04"H	
CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
3000K	330	75

Ordering Information:

Example:  
L2-SW4.4-18/30-32'

Model:

—

CCT:

—

Length:

—

Transformer/PSU

**L2-WD4.4** 4.4W/ft.

**18** 1800K, 90CRI  
**30** 3000K, 98CRI

**1'-16'**  
**C** SPECIFY  
CUSTOM

**TXXX** SPECIFIED  
SEPARATELY

**22** 2200K, 90CRI  
**30** 3000K, 98CRI