

Details:

- LinearLight 3-SW6.0 is a medium profile, versatile, high efficacy LED strip with best-in-class CRI available for a variety of applications.
- LinearLight 3-SW6.0 is provided in outputs ranging from 819lm/ft. to 1050lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.97" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE3 or BE4 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty



Profile:

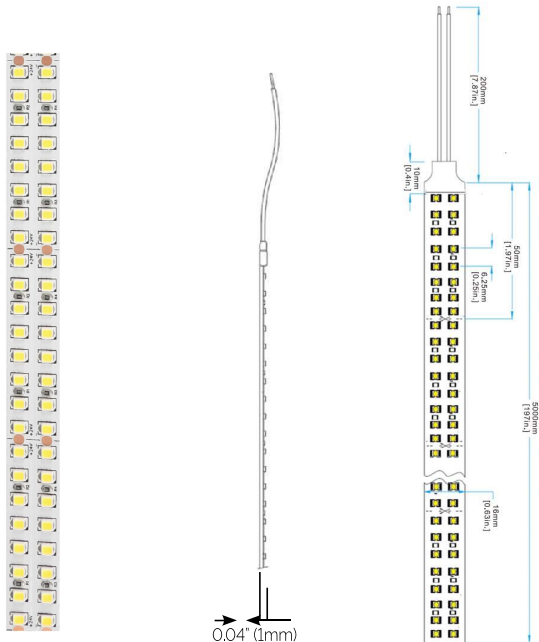

Specifications:

Average Power Consumption	6.0W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	96
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.63"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	819	136
2200K @90CRI	861	144
2400K @95CRI	882	147
2700K @98CRI	924	154
3000K @98CRI	945	157
3500K @98CRI	998	166
4000K @98CRI	1050	175

Ordering Information:

Example:  
L3-SW6.0-30-16'

Model:  - CCT:  - Length:  - Transformer/PSU:

L3-SW6.0

 6.0W/ft. 

18 1800K, 90CRI

22 2200K, 90CRI

24 2400K, 95CRI

27 2700K, 98CRI

30 3000K, 98CRI

35 3500K, 98CRI

40 4000K, 98CRI

1'-16'

 SPECIFY CUSTOM 

TXXX

 SPECIFIED SEPARATELY