

**Details:**

- LinearLight 2-SW3.6 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW3.6 is provided in outputs ranging from 331lm/ft. to 403lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

**Physical Features:**


- Factory cut lengths to 1.97" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

**Lighting Features:**

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



**Profile:**

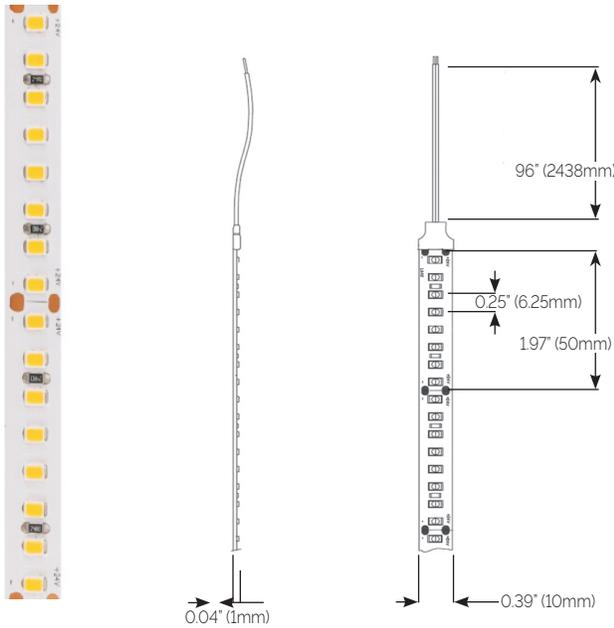

**Specifications:**

Average Power Consumption	3.6W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	49
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.39"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	383	105
2200K @90CRI	331	91
2400K @95CRI	348	96
2700K @98CRI	367	101
3000K @98CRI	383	105
3500K @98CRI	403	111
4000K @98CRI	403	111

**Ordering Information:**

Example:  
L2-SW3.6-30-32'

Model:  - CCT:  - Length:  - Transformer/PSU:

**L2-SW3.6** 3.6W/ft.      **18** 1800K, 90CRI      **1'-16'** SPECIFY CUSTOM      **TXXX** SPECIFIED SEPARATELY

**22** 2200K, 90CRI  
**24** 2400K, 95CRI  
**27** 2700K, 98CRI  
**30** 3000K, 98CRI  
**35** 3500K, 98CRI  
**40** 4000K, 98CRI