

Details:

- LinearLight 2-COB is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-COB is provided an average output of 296lm/ft
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.31" Increments with diode free illumination.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Suitable for all BE2 Profiles.
- 96" Power Leads standard.

Lighting Features:

- 150° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

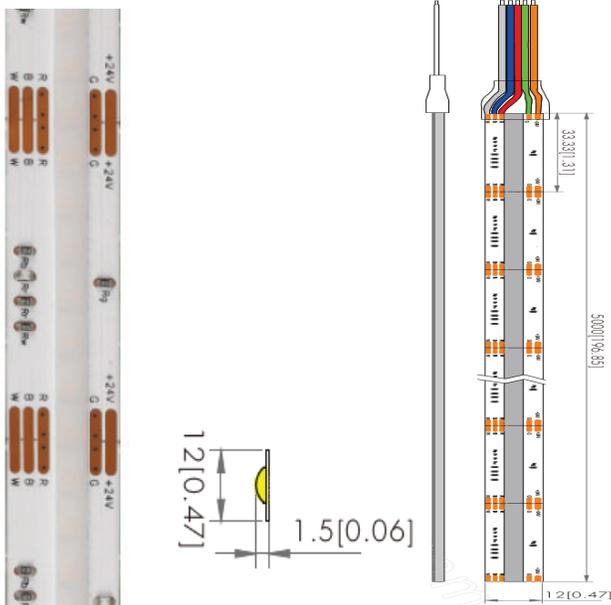

Specifications:

Average Power Consumption	5.5W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.31"
Diodes per foot	256
Max. Run	16ft.
IP Rating	IP20 (Dry location) or IP67 (Wet)
Dimensions	0.47"W x 0.06"H (* See IP67 Note)

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
ALL ON @90CRI	259	47
RED Only	37	27
GREEN Only	101	73
BLUE Only	60	44
4000K Only	104	76

Ordering Information:

Example:
L2COB-RGBW5.5-40-14'

Model: - CCT: - Length: - Transformer/PSU:

L2COB-RGBW5.5 5.5W/ft. **40** 4000K **1'-16'** SPECIFY **TXXX** SPECIFIED
C CUSTOM SEPARATELY

L2COBW-RGBW5.5

See Note on IP67 (*)

(*) L2COBW IP67 Version dimensions increase to 0.55"W x 0.16"H

LM-80
1 BIN/3-STEP