

Details:

- LinearLight 4-SW13.2 is a large profile, versatile, static white LED strip with best-in-class CRI available for a variety of applications. LinearLight 4-SW13.2 is provided in an output of 2300lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.64" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE4 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



Profile:

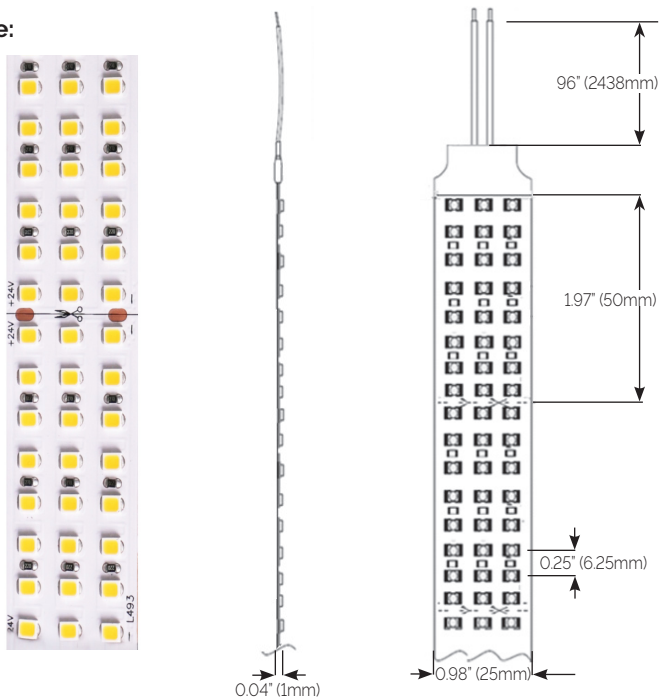

Specifications:

Average Power Consumption	13.2W/ft.	
Voltage	24V/dc	
Binning	3 step	
Cut Increment	1.97"	
Diodes per foot	146	
Max. Run	7ft.	
IP Rating	IP20 (Class II dry location)	
Dimensions	0.98"W x 0.04"H	

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2700K @95CRI	2070	158
3000K/3500K @95CRI	2185	166
4000K @95CRI	2300	175

Ordering Information:

Example:  
L4-SW13.2-30-4'

Model:

CCT:

Length:

Transformer/PSU

L4-SW13.2 13.2W/ft.

27 2700K, 95CRI  
30 3000K, 95CRI  
35 3500K, 95CRI  
40 4000K, 95CRI

1'-16' C SPECIFY CUSTOM

TXXX SPECIFIED SEPARATELY