

Sheetled - Tunable White

CONVEY

Details:

- Flat Panel and Bendable LED Sheets for Backlighting Applications.
- Not Recommended for direct view applications.
- Flexible for various applications and field cuttable with scissors.

Features:

- Cut Segments in 0.94"x0.94" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 90CRI Standard
- TM-30 data available at www.conveylighting.com

Also available in Static White, RGBW and RGB+TW options



Dimensions:

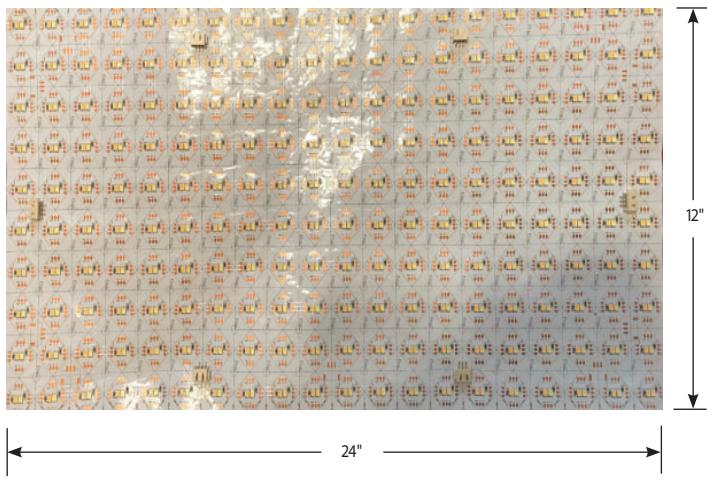

Specifications:

Average Power Consumption	20w/40w/60w/90w Per 12"x24" Sheet
Voltage	24V/dc
Binning	3 step
Cut Increment	1 LED Sections (0.94"x0.94")
Height with XH Connector	0.31"
Max. Connection	240w / 10amp @ 24v
IP Rating	IP20 or IP54 Options
Beam Angle	120 Degrees

Wattage	Lumen Output (lm/ft2.)
20w	1590
40w	3060
60w	4490
90w	6430

Data based on
4000k Output.
2700k x 0.90
3000/3500k x 0.95
4000k+ x 1.00

Ordering Information:

Example:

SHEET-TW-35-90-IP20 (18k to 35k)


Model:

CCT(White):

Wattage:

Rating:

Feed and Connector (Included)



SHEET-TW

27 2700K, 90CRI
30 3000K, 90CRI
35 3500K, 90CRI
40 4000K, 90CRI
50 5000K, 90CRI
65 6500K, 90CRI

20 20w Per 12x24
40 40w Per 12x24
60 60w Per 12x24
90 90w Per 12x24

IP20 Dry Location
IP54 Damp Location



"XH" Connector for secure connections

Power Supply Data Sheet

T-PSU-DMX (2 Channel)

Universal Voltage 24v Driver with
built in DMX Encoder.

Warm LED is standard at 1800k

Custom Sheets available - example 35k+65k



LM-80

