

Details:

- LinearLight 2-SW2.6 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW2.6 is provided in outputs ranging from 321lm/ft. to 391lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.97" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

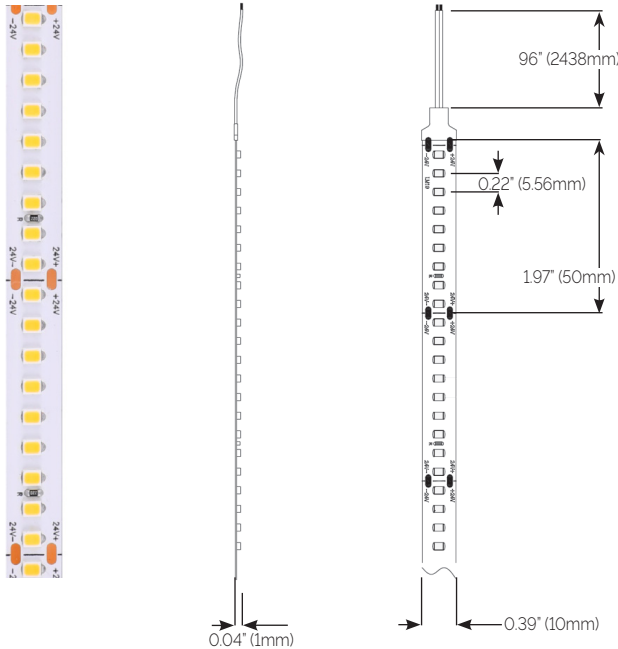

Specifications:

Average Power Consumption	2.6W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	55
Max. Run	16ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.39"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	364	140
2200K @90CRI	321	123
2400K @95CRI	338	130
2700K @98CRI	356	137
3000K @98CRI	371	143
3500K @98CRI	391	150
4000K @98CRI	391	150

Ordering Information:

Example:
L2-SW2.6-30-32'

Model: - CCT: - Length: - Transformer/PSU:

L2-SW2.6 2.6W/ft.

18 1800K, 90CRI
22 2200K, 90CRI
24 2400K, 95CRI
27 2700K, 98CRI
30 3000K, 98CRI
35 3500K, 98CRI
40 4000K, 98CRI

1'-16' SPECIFY
C CUSTOM

TXXX SPECIFIED
 SEPARATELY