

# Flex2 Tunable White 5w

# CONVEY

## Details:

- Flexible and Dual Axis Bendable LED profile.
- Standard product is IP67 Rated for indoor and outdoor use.
- "Dot" Free


## Features:

- Cut Segments in 1.97"
- Mounting via brackets, clips, straight or curved channel.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.


## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70) Indoors and 36,000hr Outdoors
- 90CRI Standard
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)


Also available in Static White, RGB and Warm Dim Options

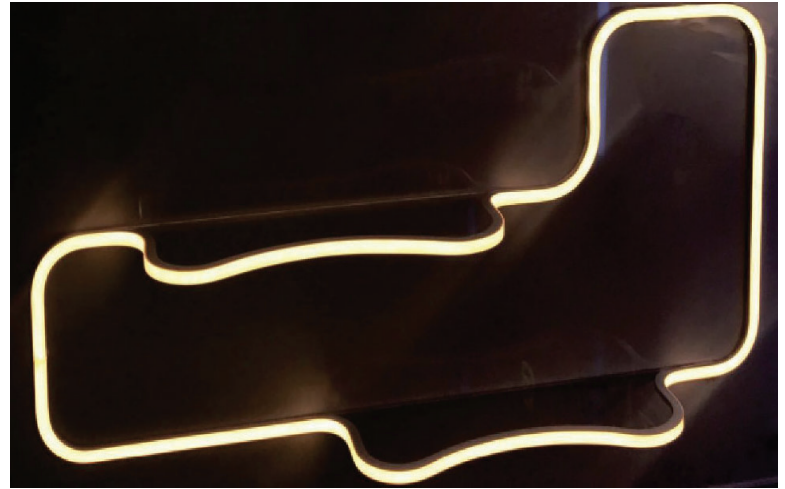

## Feed Options:



"SIDE" Feed




"BACK" Feed

## Specifications:

Average Power Consumption	4.27w per Foot (Based on 4000k)
Voltage	24v DC
Binning	3 step
Cut Increment	1.97"
Lumens @ 4000k / 90CRI	204lm/ft
Max. Connection	16.4'
IP Rating	IP67 Standard
Beam Angle	120 Degrees

## Sectional



## Ordering Information:

Example:  
FLEX2-5W-TW-27/60-24-S-MPF

Model:	Tunable White:	Voltage:	Feed Type:	Mounting:
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>FLEX2-5W-TW</b>	<b>27/60</b> <b>18/40</b>	<b>2700K-6500K</b> <b>1800K-4000K</b>	<b>24</b> 24v DC	<b>MC</b> Clip <b>MB</b> Bracket <b>MPS</b> Profile Straight <b>MPF</b> Profile Flexible

Special CCT mixing available  
ie: 1800k/3500k  
Minimums may apply

Mounting:



"MC" Clip



"MB" Bracket



"MPS" Profile



"MPF" Profile



LM-80

