

# Flex Wash Static White 5.5W

## Details:

- Flexible Top Bendable LED grazer/washer with multiple beam spreads for a variety of applications.
- Standard product is IP67 Rated for indoor and outdoor use.

## Features:


- Factory cut lengths to 6.56" increments
- Mounting via adhesive tape or clips. 3M (5604A) red adhesive tape attached on backside, standard.
- Factory Cutting and Kiting Suggested.
- Power Leads and Connectors included at no charge.

## Lighting Features:

- 20°, 30°, 40°, 60°, and asymmetric 20°x45° beam spreads available
- 50,000hr Life (L70) Indoors and 36,000hr Outdoors
- 5 year warranty (Indoor), 3 year (Outdoor)
- 90CRI Standard
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)




## Profile:

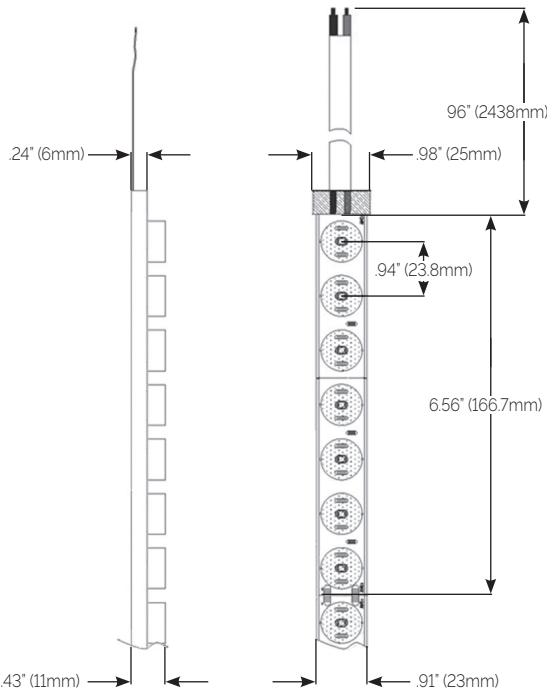

**Mounting Clips**  
(1) clip per 3' recommended

## Specifications:

Average Power Consumption	5.5W per Foot
Voltage	24V DC
Binning	3 step
Cut Increment	6.56"
Lumens @ 4000K / 90CRI	510lm/ft
Max. Connection	24V (16.4')
IP Rating	IP67 Standard
Beam Angle	20°, 30°, 40°, 60°, 20°x45° asymmetric

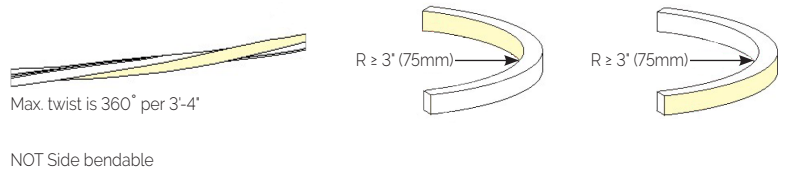

## Ordering Information:

Example:  
FLEX-W-SW5.5-30-30-24-MC

Model:	CCT(White):	Beam Angle	Voltage:	Mounting:	Transformer/PSU
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>FLEX-W-SW5.5</b>	<b>27</b> 2700K, 90CRI <b>30</b> 3000K, 90CRI <b>35</b> 3500K, 90CRI <b>40</b> 4000K, 90CRI <b>50</b> 5000K, 90CRI <b>65</b> 6500K, 90CRI	<b>20</b> 20° <b>30</b> 30° <b>40</b> 40° <b>60</b> 60° <b>ASY</b> 20°x45°	<b>24</b> 24VDC	<b>MC</b> Clips	<b>TXXX</b> SPECIFIED SEPARATELY

2700K LLF: .90  
 3000K/3500K LLF: .95  
 5000K/6500K LLF: 1.0  
 2200K and 2400K available as special order  
 Minimum purchase may apply

